

Ротаторы. Серия GV 124. Технические характеристики.

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69



Rotator GV 124

Technical data


Part No.	5112134	
Type of rotator	Grapple saw rotator	
Weight	59 kg	
Rotation	360 degrees	
Max axial load, static	100 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	2200 Nm	
Rotation max oilflow	25 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	20 MPa	
Grapple close max working pressure	25 MPa	
Extra function 1 max working pressure	25 MPa	
Extra function 2 max working pressure	25 MPa	



Interface

Upper interface	80 mm
Lower interface	Ø 173 mm

Rotator with two extra connections for e.g. a grapple saw.
Adapter sets are available for alternative connections.

We reserve the right to make product changes.

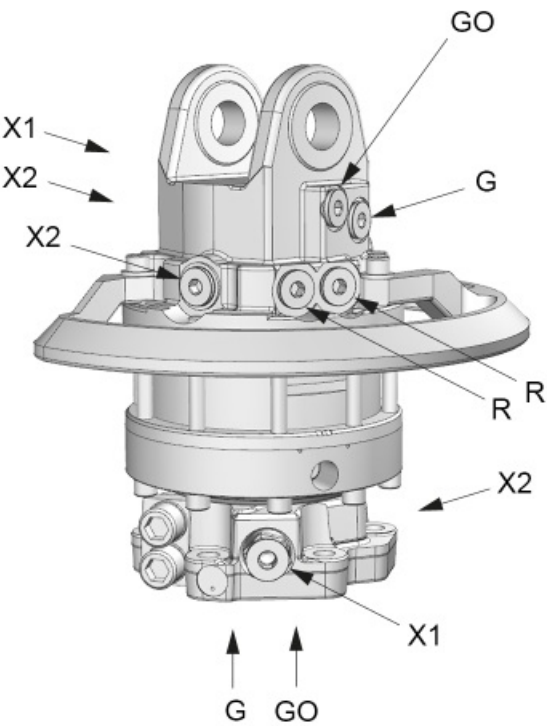

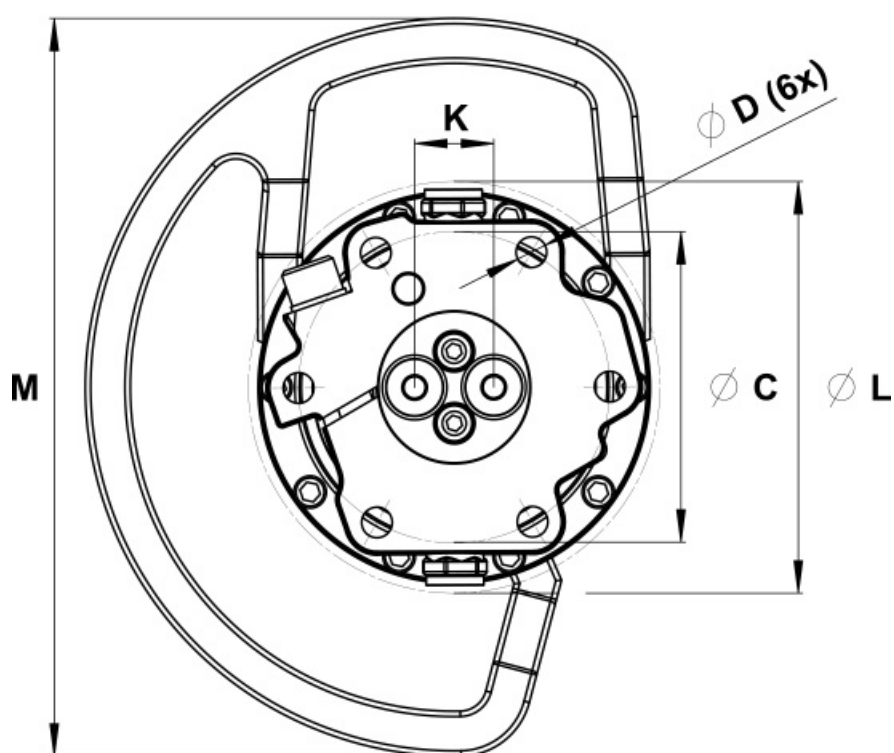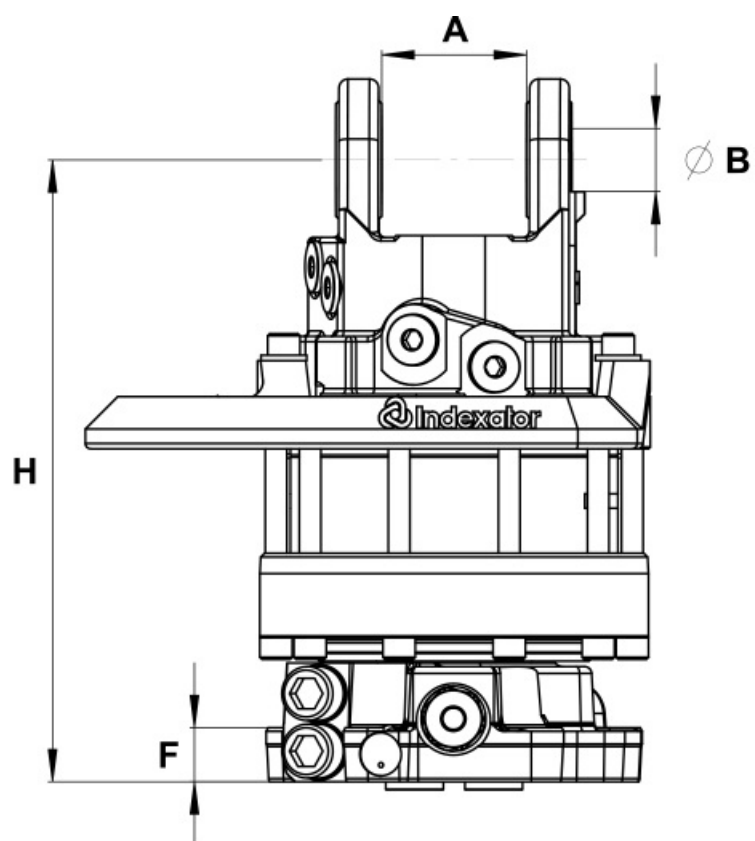

GV 124**A** 80,5 mm**B** Ø35 mm**C** Ø173 mm**D** Ø17 mm**F** 30 mm**H** 345 mm**K** 44 mm**L** Ø229 mm**M** 410 mm**Connections****Upper connection** G 1/2**Lower connection** G 3/4**Upper** X1 G 3/4

X2 G 3/4

Lower X1 G 3/4

X2 G 3/4



Rotator GV 124 M16

Technical data


Part No.	5112139	
Type of rotator	Grapple saw rotator	
Weight	56.6 kg	
Rotation	360 degrees	
Max axial load, static	100 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	2200 Nm	
Rotation max oilflow	25 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	20 MPa	
Grapple close max working pressure	25 MPa	
Extra function 1 max working pressure	25 MPa	
Extra function 2 max working pressure	25 MPa	



Interface

Upper interface	80 mm
Lower interface	Ø 173 mm

Rotator with two extra connections for e.g. a grapple saw.
Adapter sets are available for alternative connections.

We reserve the right to make product changes.

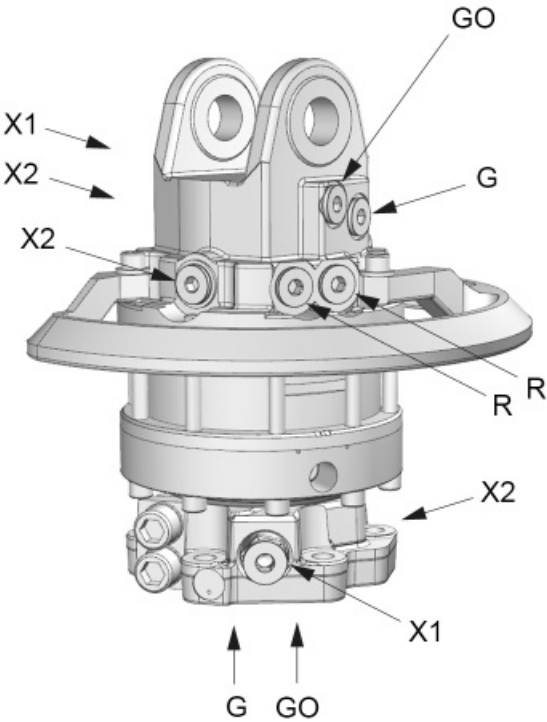

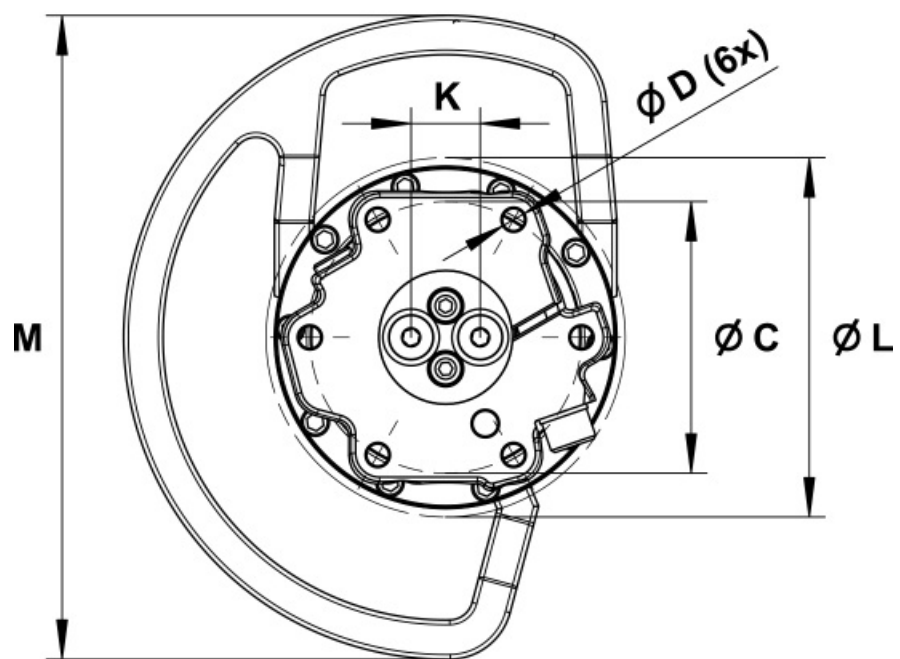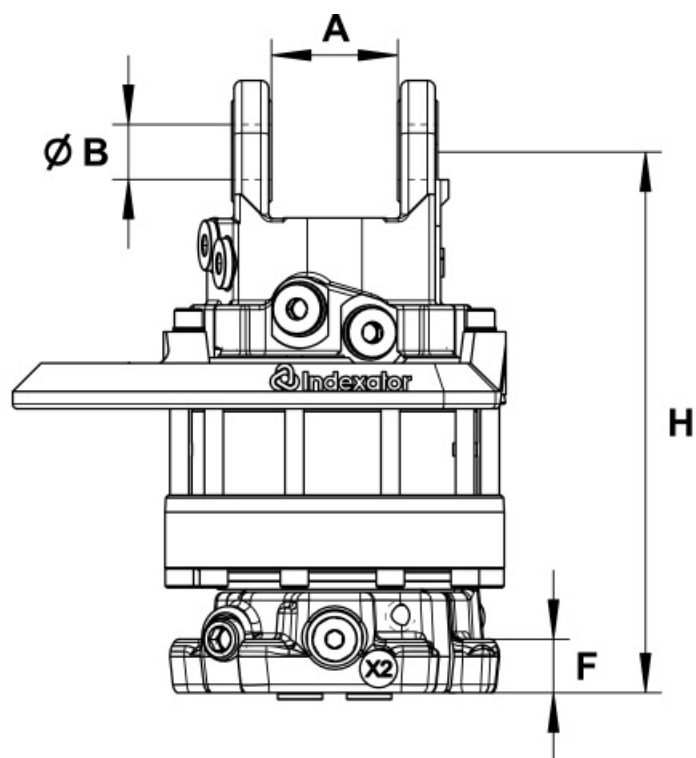

GV 124 M16**A** 80,5 mm**B** Ø35 mm**C** Ø173 mm**D** M16**F** 30 mm**H** 345 mm**K** 44 mm**L** Ø229 mm**M** 410 mm**Connections****Upper connection** G 1/2**Lower connection** G 3/4**Upper** X1 G 3/4

X2 G 3/4

Lower X1 G 3/4

X2 G 3/4



Rotator GV 1245

Technical data


Part No.	5112127	
Type of rotator	Grapple saw rotator	
Weight	65.9 kg	
Rotation	360 degrees	
Max axial load, static	100 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	2200 Nm	
Rotation max oilflow	25 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	20 MPa	
Grapple close max working pressure	25 MPa	
Extra function 1 max working pressure	25 MPa	
Extra function 2 max working pressure	25 MPa	



Interface

Upper interface	100 mm
Lower interface	Ø 173 mm

Rotator with two extra connections for e.g. a grapple saw.
Adapter sets are available for alternative connections.

We reserve the right to make product changes.

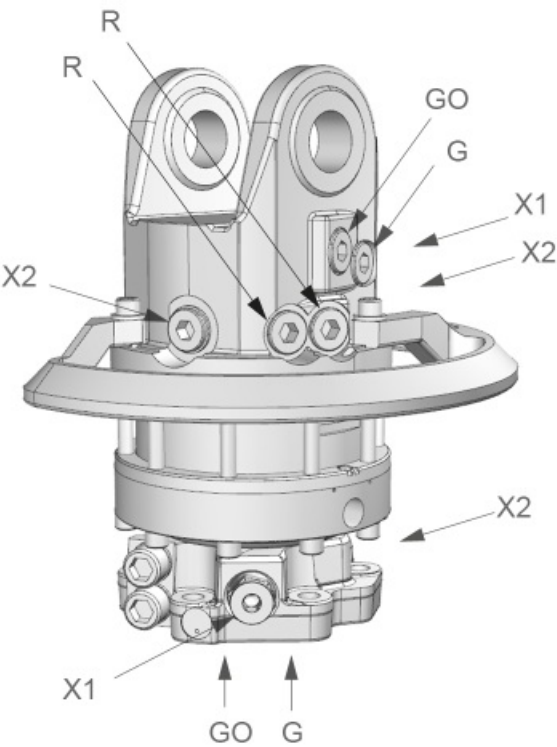

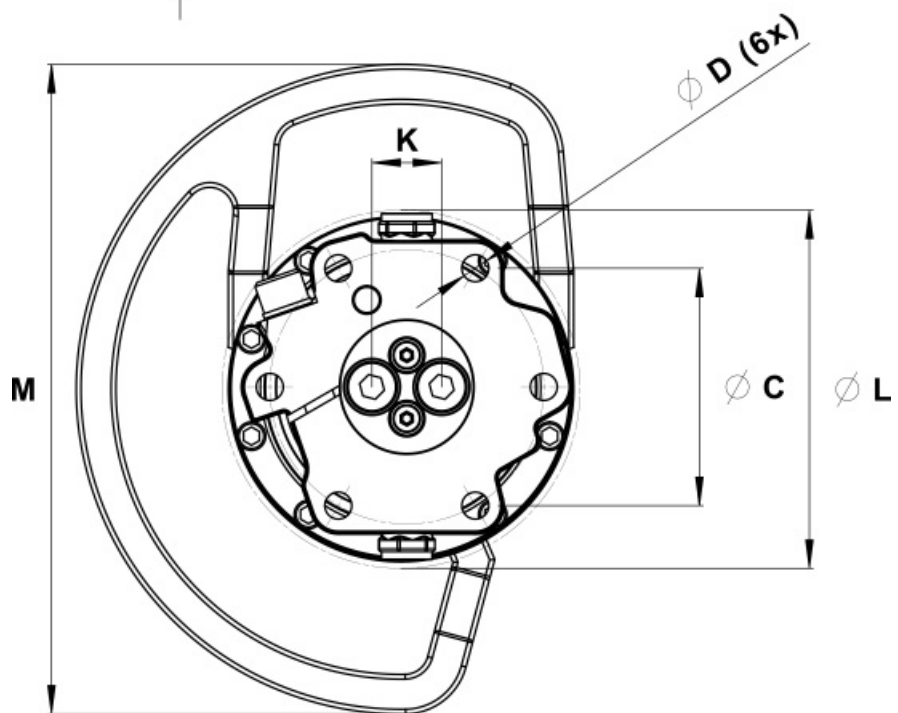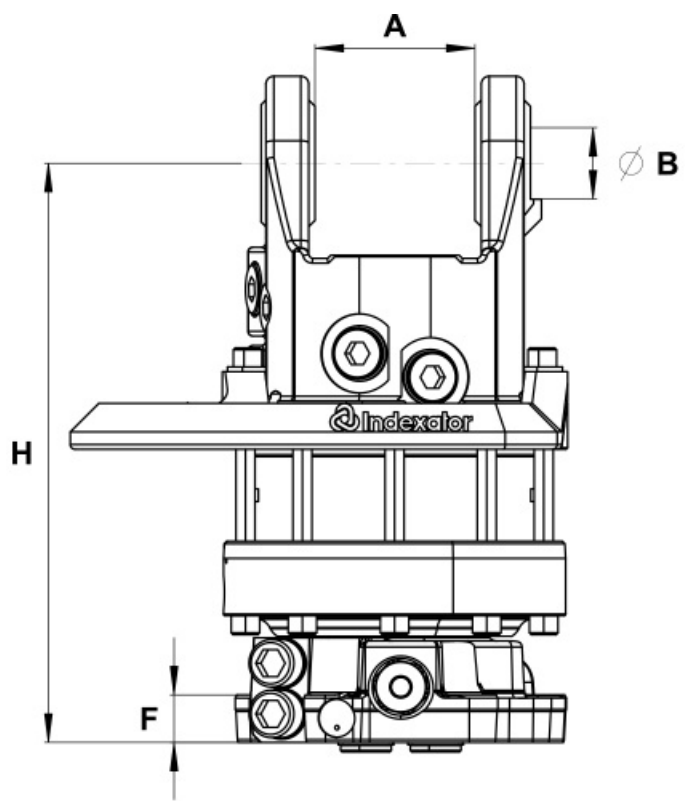

GV 124S

A	101 mm
B	Ø45 mm
C	Ø173 mm
D	Ø17 mm
F	30 mm
H	365 mm
K	44 mm
L	Ø229 mm
M	410 mm

Connections

Upper connection	G 1/2	
Lower connection	G 3/4	
Upper	X1	G 3/4
	X2	G 3/4
Lower	X1	G 3/4
	X2	G 3/4



Rotator GV 124S 203

Technical data


Part No.	5112153	
Type of rotator	Grapple saw rotator	
Weight	66 kg	
Rotation	360 degrees	
Max axial load, static	100 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	2200 Nm	
Rotation max oilflow	25 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	20 MPa	
Grapple close max working pressure	25 MPa	
Extra function 1 max working pressure	25 MPa	
Extra function 2 max working pressure	25 MPa	



Interface

Upper interface	100 mm
Lower interface	Ø 203 mm

Rotator with two extra connections for e.g. a grapple saw.
Adapter sets are available for alternative connections.

We reserve the right to make product changes.

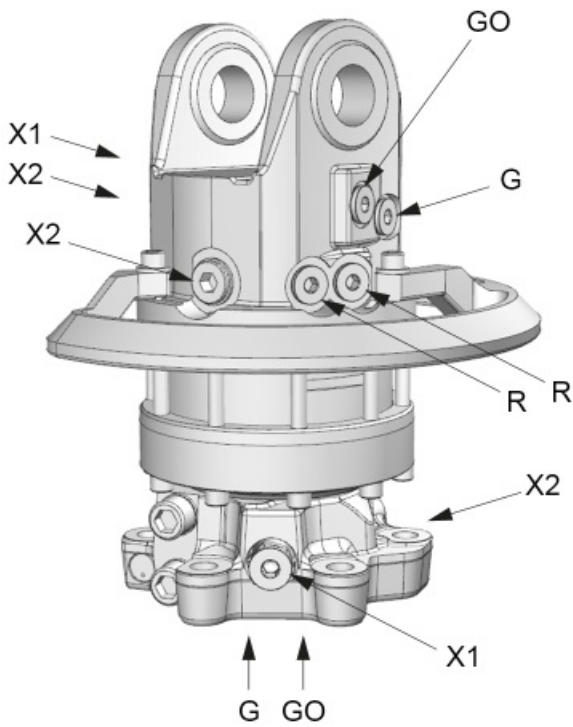

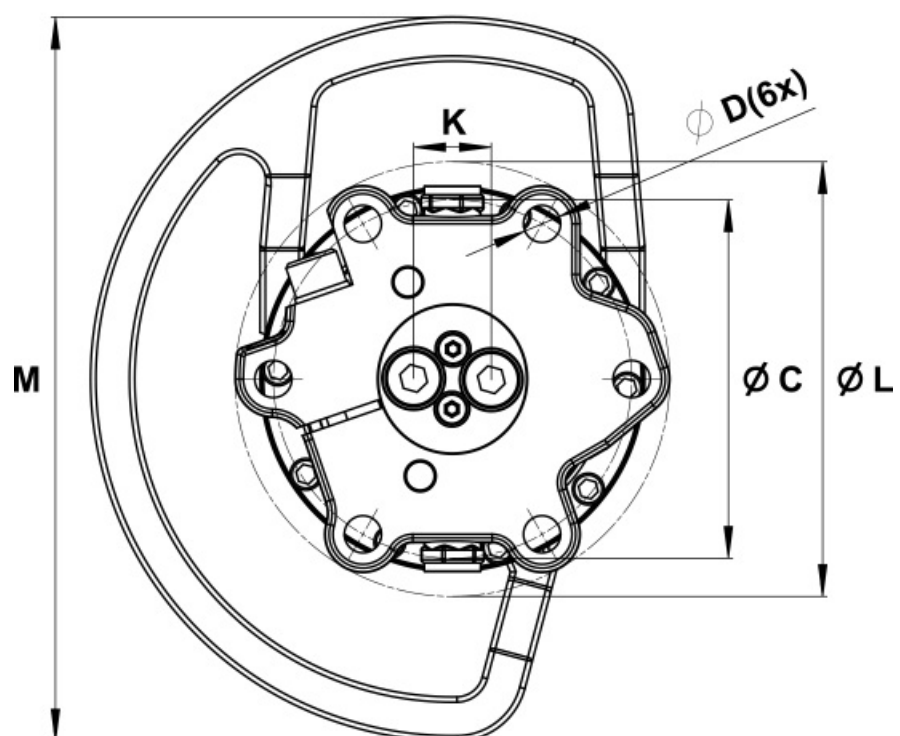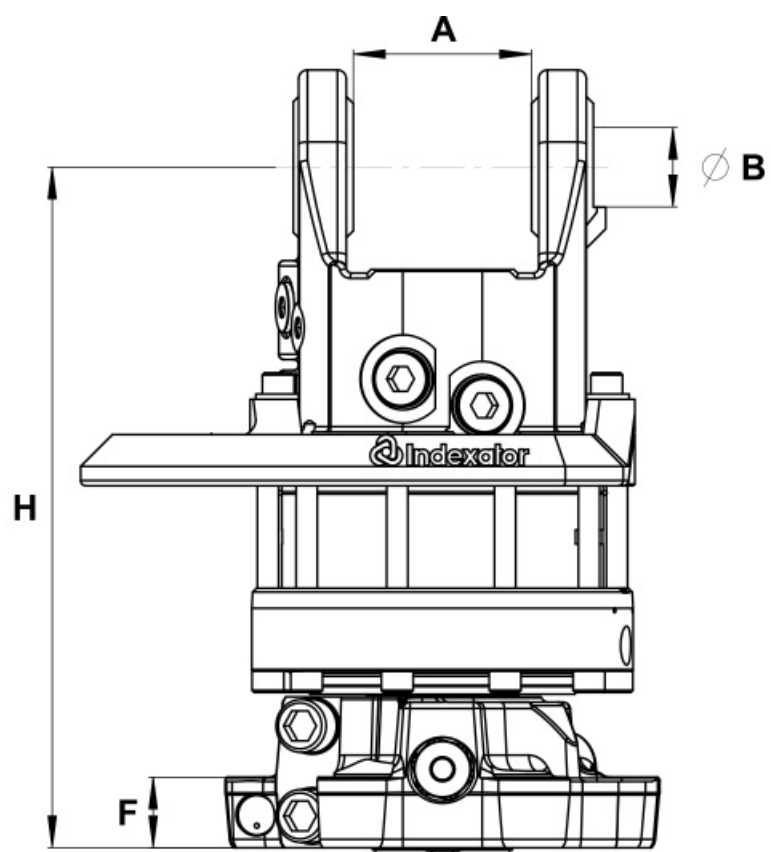

GV 124S 203

A	101 mm
B	Ø45 mm
C	Ø203 mm
D	Ø21 mm
F	40 mm
H	385 mm
K	44 mm
L	Ø248 mm
M	410 mm

Connections

Upper connection	G 1/2	
Lower connection	G 3/4	
Upper	X1	G 3/4
	X2	G 3/4
Lower	X1	G 3/4
	X2	G 3/4



Rotator GV 124S M16

Technical data


Part No.	5112140	
Type of rotator	Grapple saw rotator	
Weight	66.2 kg	
Rotation	360 degrees	
Max axial load, static	100 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	2200 Nm	
Rotation max oilflow	25 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	20 MPa	
Grapple close max working pressure	25 MPa	
Extra function 1 max working pressure	25 MPa	
Extra function 2 max working pressure	25 MPa	



Interface

Upper interface	100 mm
Lower interface	Ø 173 mm

Rotator with two extra connections for e.g. a grapple saw.
Adapter sets are available for alternative connections.

We reserve the right to make product changes.

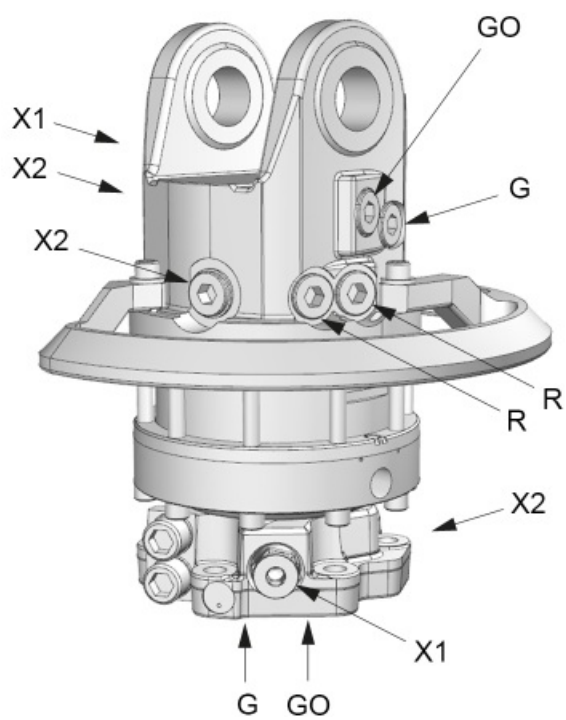

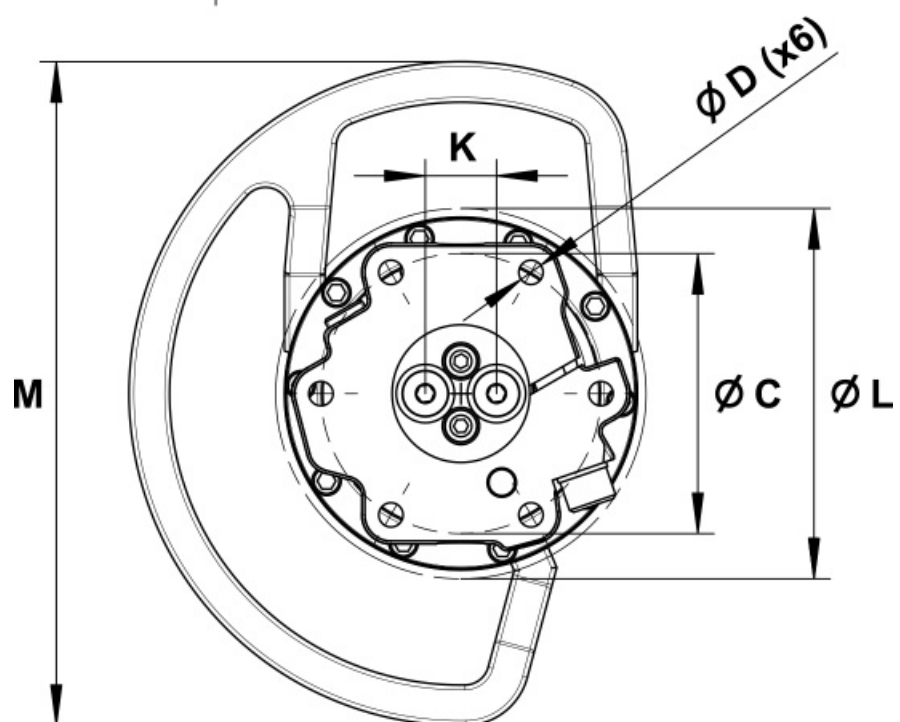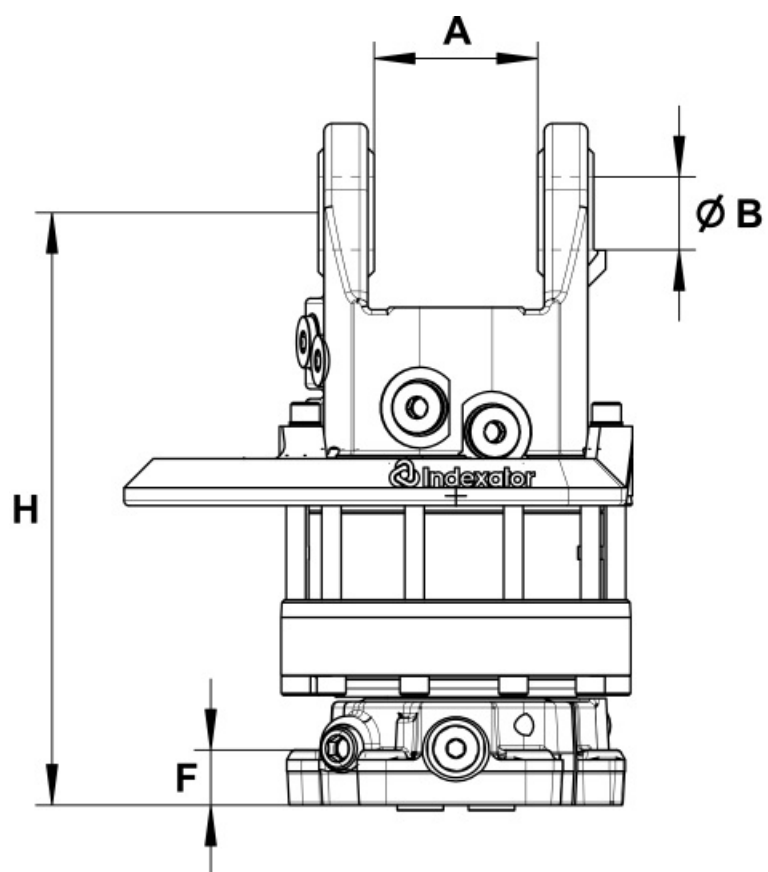

GV 124S M16

A	101 mm
B	Ø45 mm
C	Ø173 mm
D	M16
F	30 mm
H	365 mm
K	44 mm
L	Ø229 mm
M	410 mm

Connections

Upper connection	G 1/2	
Lower connection	G 3/4	
Upper	X1	G 3/4
	X2	G 3/4
Lower	X1	G 3/4
	X2	G 3/4

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69