

Ротаторы. Серия Н 172. Технические характеристики.

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69



Rotator H 172

Technical data

Part No.	7214063	
Type of rotator	Harvester head rotator	
Weight	62.9 kg	
Rotation	360 degrees	
Max axial load, static	160 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	3300 Nm	
Rotation max oilflow	35 l/min	
Rotation max working pressure	25 MPa	


Interface



Upper interface	MPB2 184 mm
Lower interface	Ø 243 mm

Rotator suitable for MPB swing dampers.

Adapter sets are available for alternative connections.

We reserve the right to make product changes.

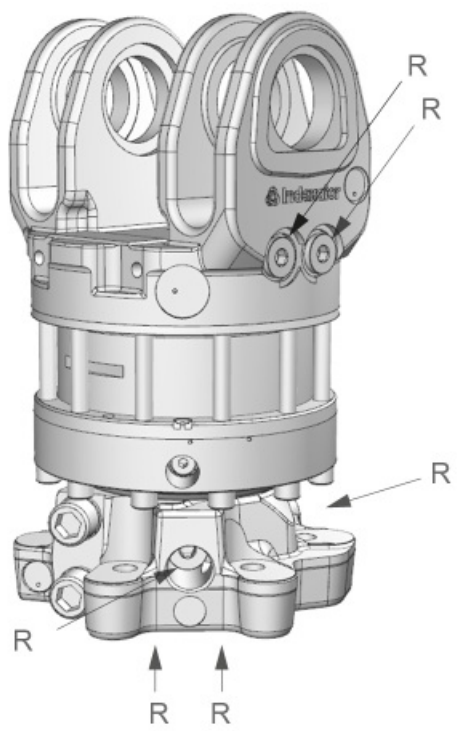

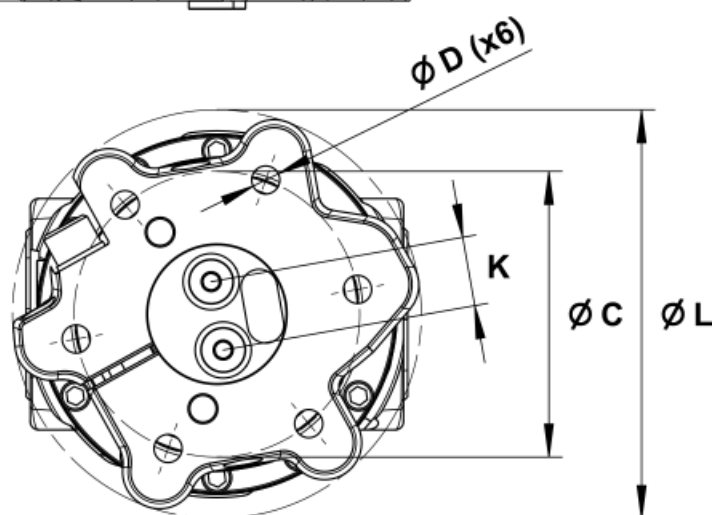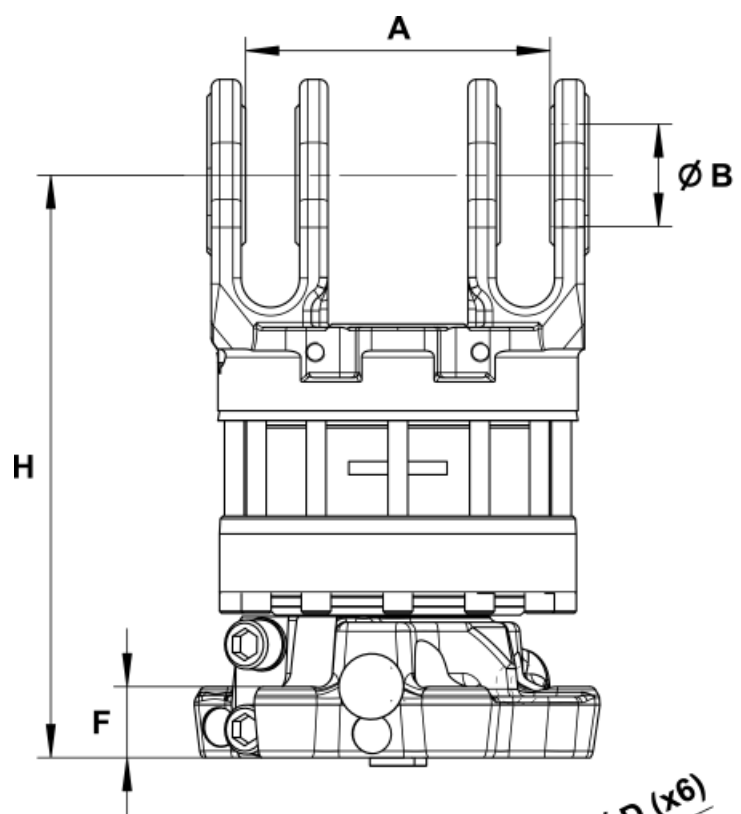

H 172	
A	MPB2
B	MPB
C	Ø173 mm
D	Ø17 mm
F	40 mm
H	352 mm
K	42 mm
L	Ø248 mm

Connections	
Upper connection	G 1/2
Lower connection	G 1/2



Rotator H 172 A

Technical data

Part No.	7214064	
Type of rotator	Harvester head rotator	
Weight	63.7 kg	
Rotation	360 degrees	
Max axial load, static	160 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	3300 Nm	
Rotation max oilflow	35 l/min	
Rotation max working pressure	25 MPa	

Interface


Upper interface	MPB2 184 mm
Lower interface	Ø 243 mm


Rotator suitable for MPB swing dampers.

Rotator with only axial connections for a grapple function.

Adapter sets are available for alternative connections.

We reserve the right to make product changes.

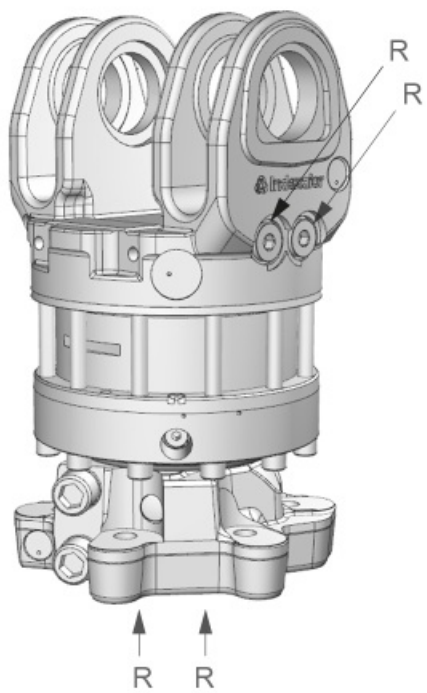

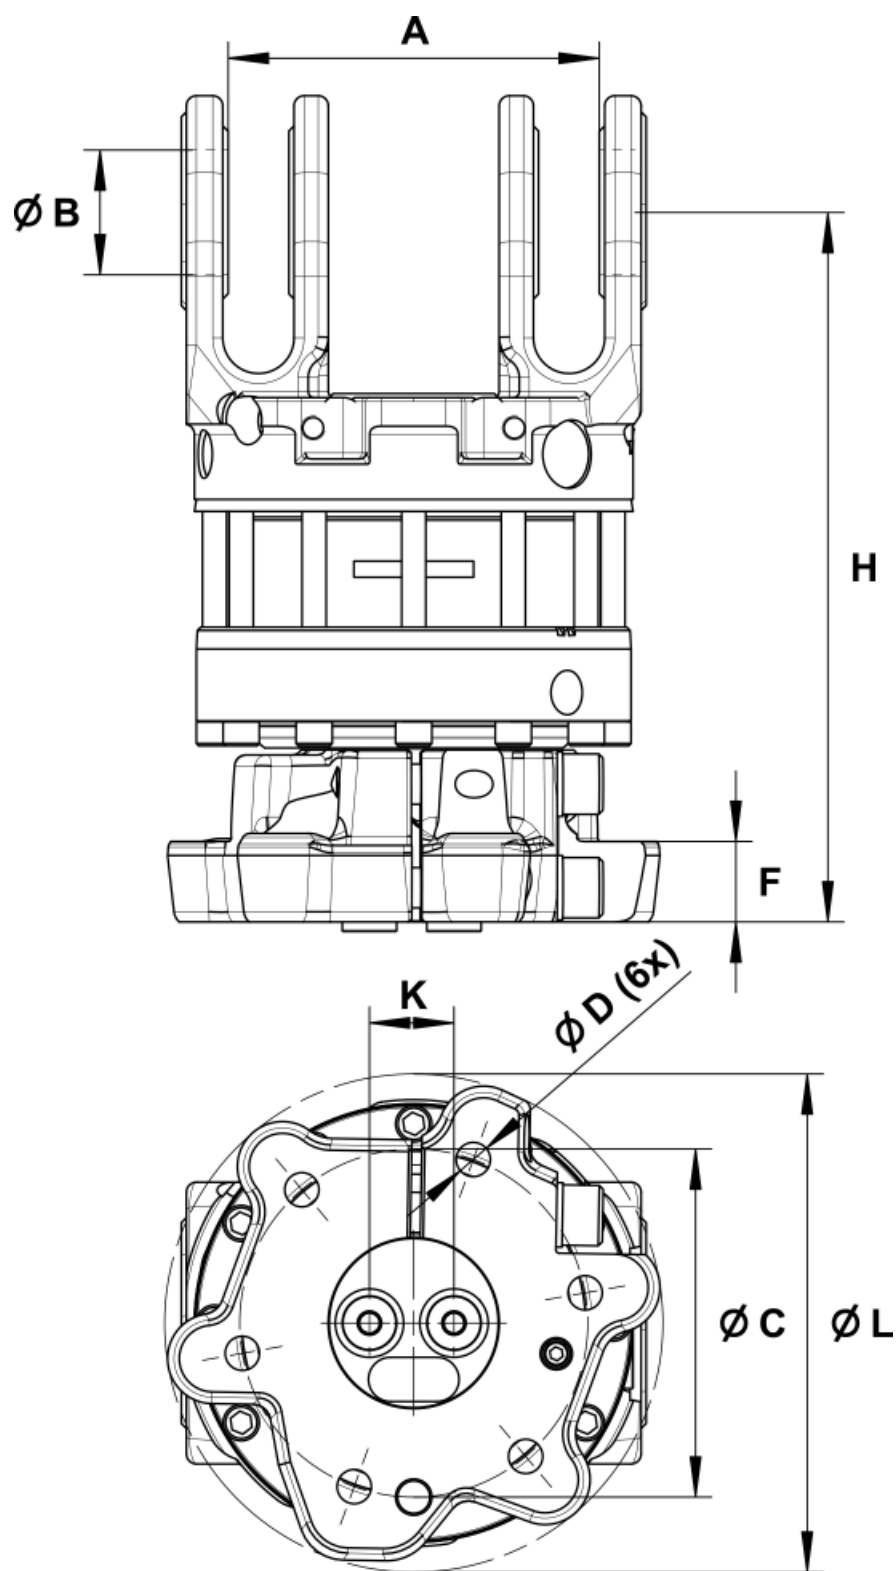

H 172 A	
A	MPB2
B	MPB
C	Ø173 mm
D	Ø17 mm
F	40 mm
H	352 mm
K	42 mm
L	Ø248 mm

Connections	
Upper connection	G 1/2
Lower connection	G 1/2



Rotator H 172 A LS

Technical data

Part No.	7214065	
Type of rotator	Harvester head rotator	
Weight	63.7 kg	
Rotation	360 degrees	
Max axial load, static	160 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	3300 Nm	
Rotation max oilflow	35 l/min	
Rotation max working pressure	25 MPa	

Function

Load Sense¹

Interface

Upper interface	MPB2 184 mm
Lower interface	Ø 243 mm


¹ A rotator with the shortening LS is not equipped with restrictors (unlike our standard rotators). This means that the oil flow from the base machine has to be adapted.


Rotator suitable for MPB swing dampers.

Rotator with only axial connections for a grapple function.

Adapter sets are available for alternative connections.

We reserve the right to make product changes.

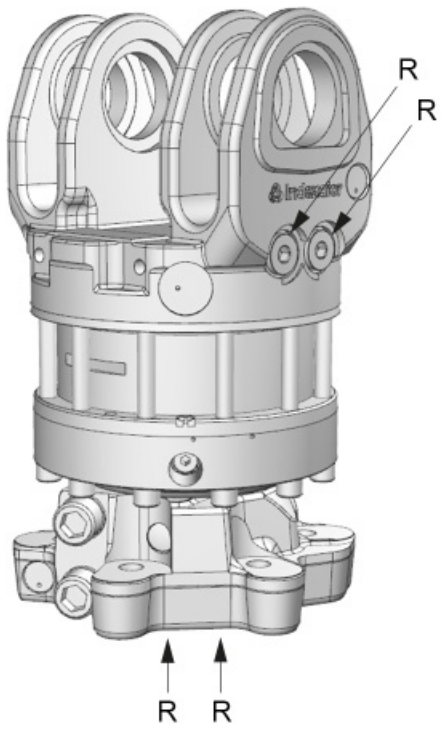

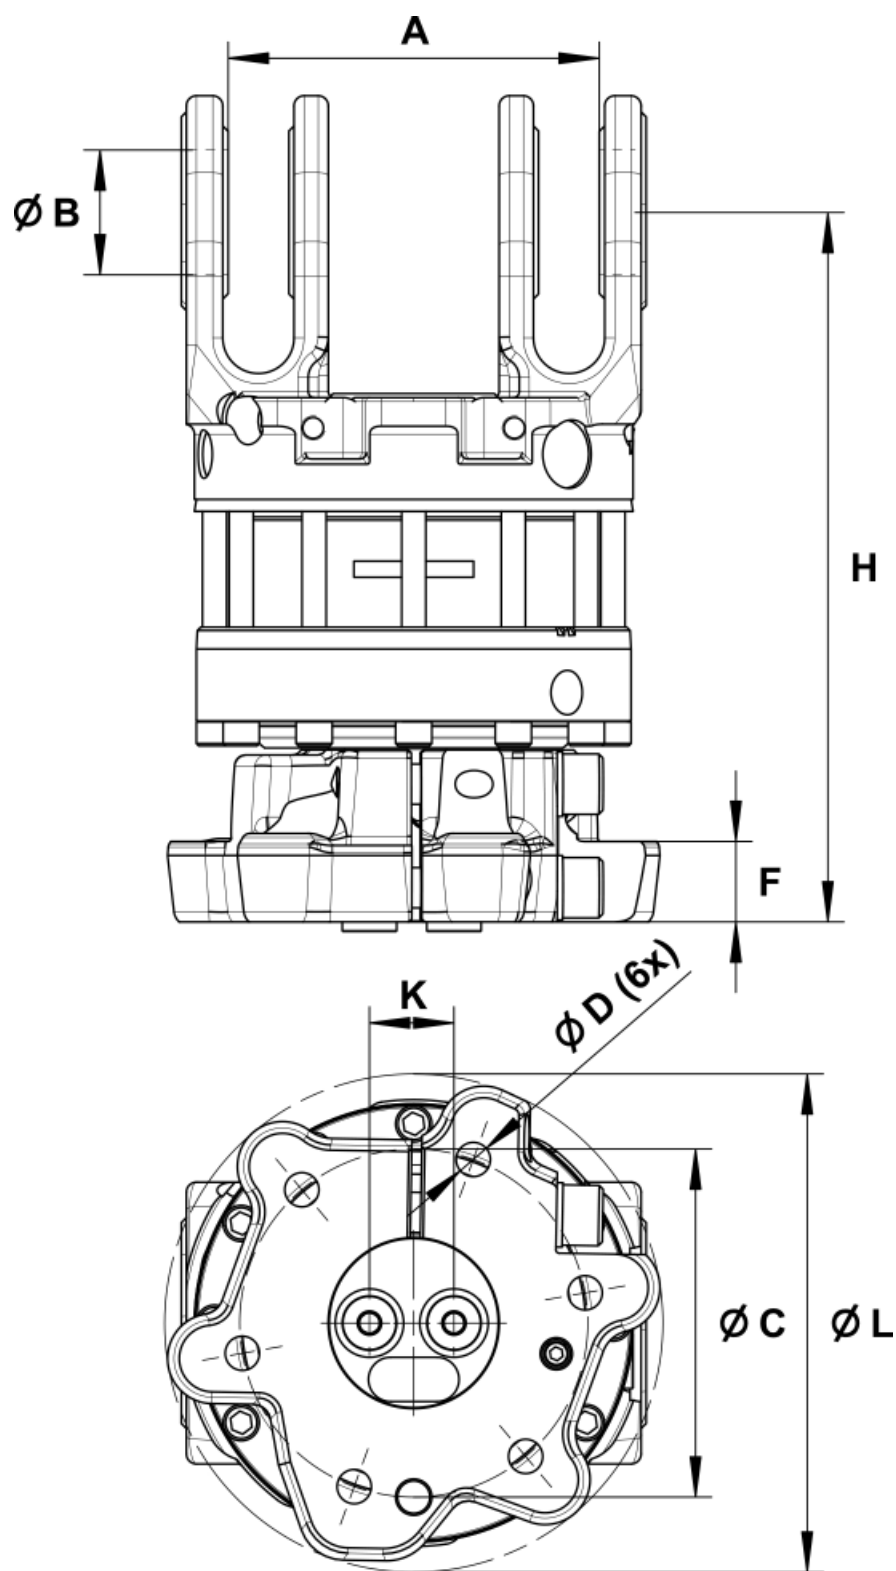

H 172 A LS	
A	MPB2
B	MPB
C	Ø173 mm
D	Ø17 mm
F	40 mm
H	352 mm
K	42 mm
L	Ø248 mm

Connections	
Upper connection	G 1/2
Lower connection	G 1/2



Rotator H 172 D

Technical data

Part No.	7214066	
Type of rotator	Harvester head rotator	
Weight	63.7 kg	
Rotation	360 degrees	
Max axial load, static	160 kN	
Max axial load, dynamic	50 kN	
Torque at 25 Mpa	3300 Nm	
Rotation max oilflow	35 l/min	
Rotation max working pressure	25 MPa	


Interface


Upper interface	MPB2 184 mm
Lower interface	Ø 243 mm

Rotator suitable for MPB swing dampers.

Adapter sets are available for alternative connections.

We reserve the right to make product changes.

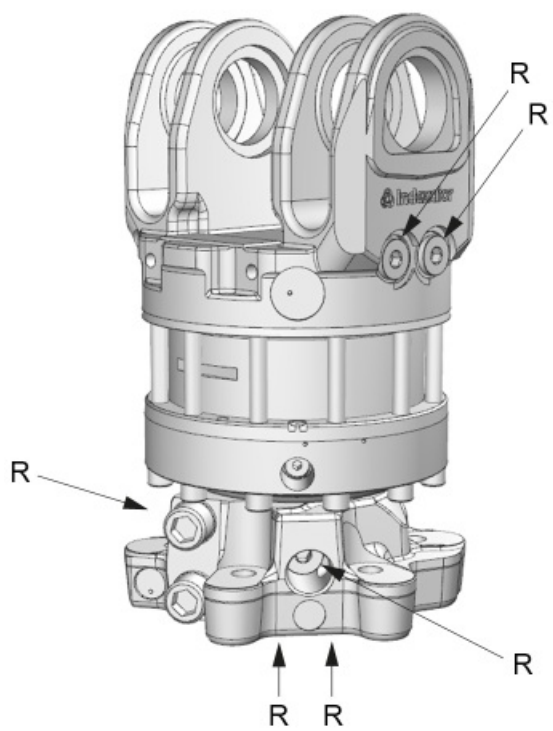

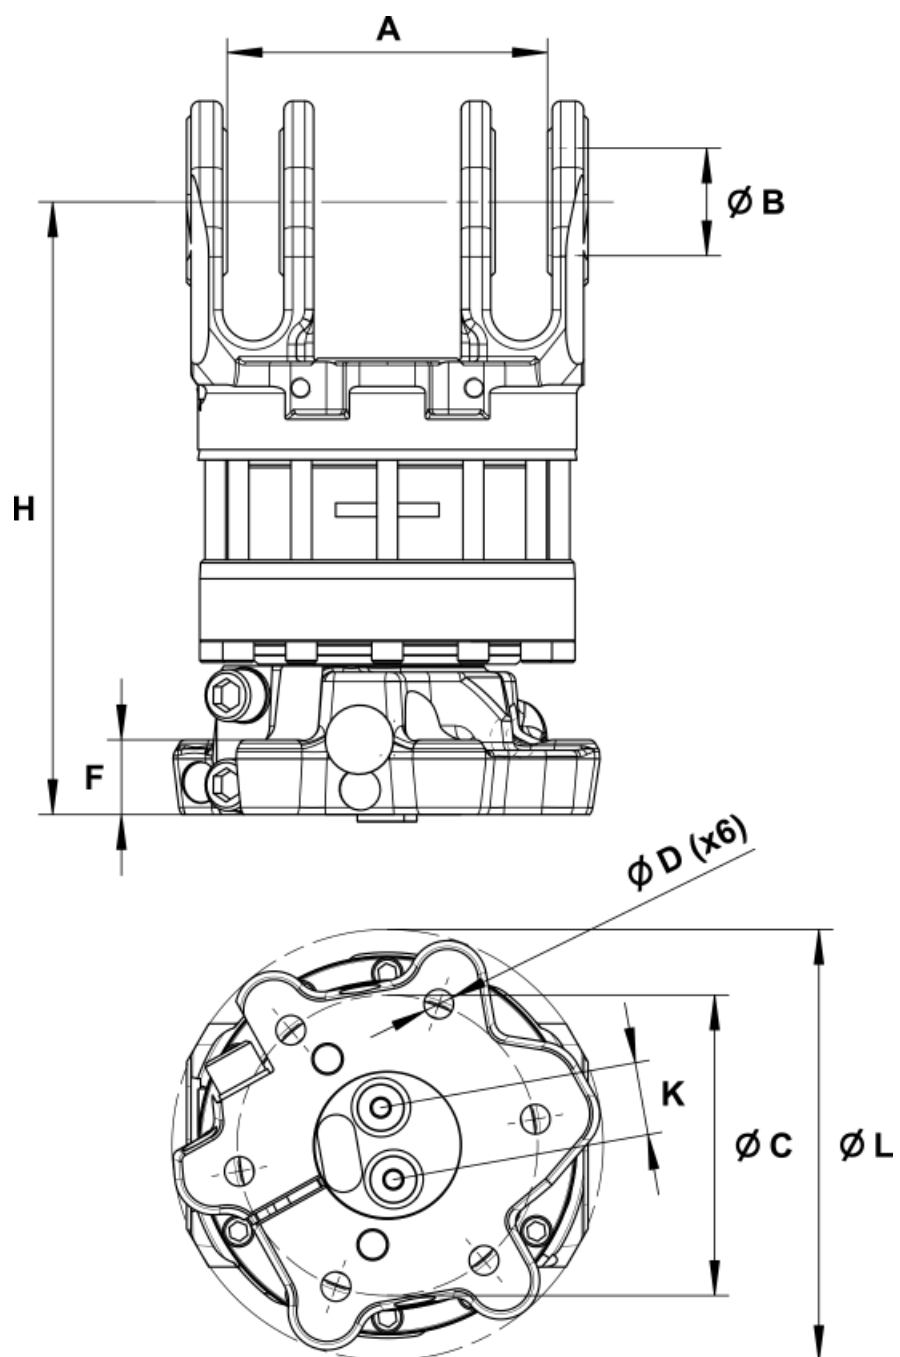

H 172 D	
A	MPB2
B	MPB
C	Ø173 mm
D	Ø17 mm
F	40 mm
H	352 mm
K	42 mm
L	Ø248 mm

Connections	
Upper connection	G 1/2
Lower connection	G 1/2

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69