

Ротаторы. Серия XR 500. Технические характеристики.

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69



Rotator XR 500 C

Technical data

Part No.	8500001	
Type of rotator	Grapple rotator	
Weight	216 kg	
Rotation	360 degrees	
Max axial load, static	±700 kN ¹	
Max axial load, dynamic	±250 kN	
[MaxRadialLoad]	±180 kN	
Torque at 25 Mpa	7000 Nm	
Rotation max oilflow	40 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	35 MPa	
Grapple close max working pressure	35 MPa	
Extra function 1 max working pressure	40 MPa	

Function

Central lubrication

Interface


Upper interface	265 mm
Lower interface	Ø 463 mm




¹ Max axial load static indicate theoretical max load for hanging applications without accelerations.

Oil distributor ordered separately

Pressure limiting valves fitted.

We reserve the right to make product changes.

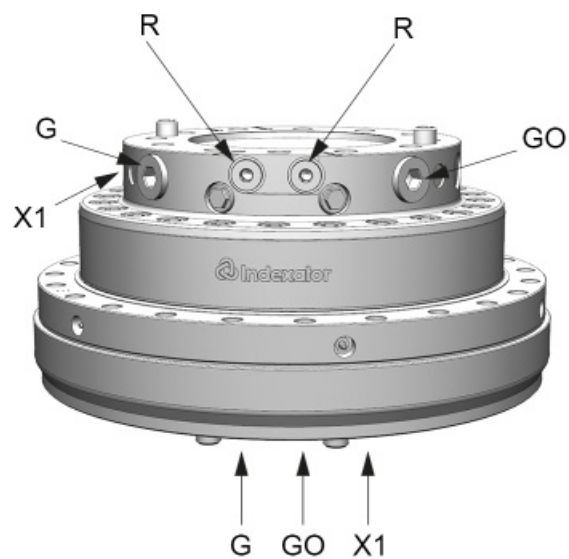

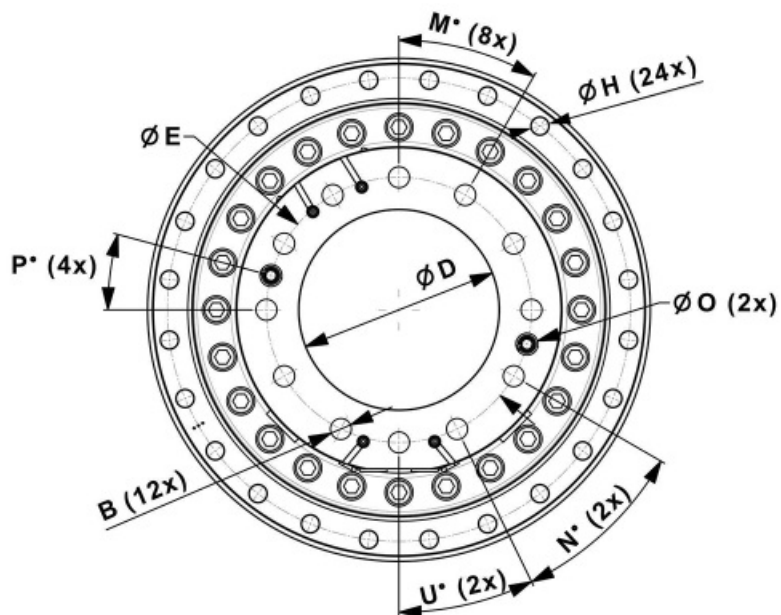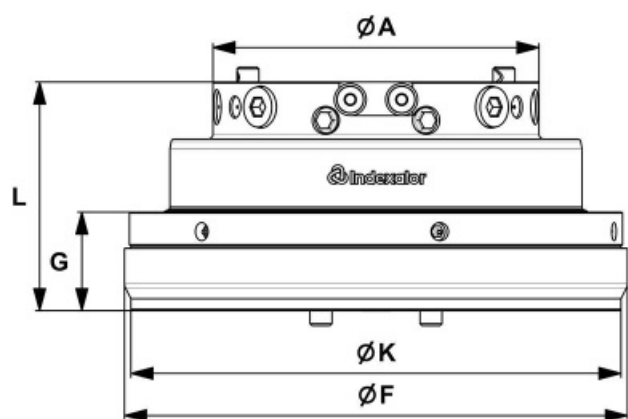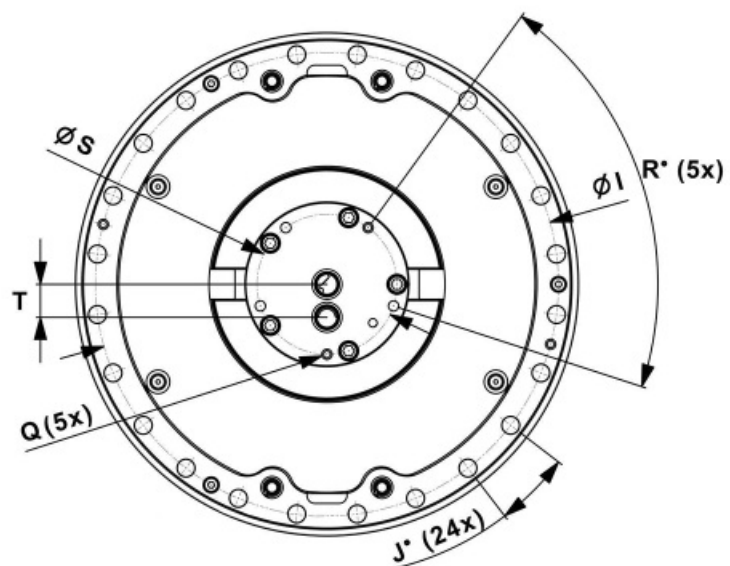

XR 500 C**A** Ø326 mm**B** M24**D** Ø200 mm**E** Ø265 mm**F** Ø503 mm**G** 98,5 mm**H** Ø17,5 mm**I** Ø463 mm**J** 15°**K** Ø490 mm**L** 228,5 mm**M** 30°**N** 34°**O** Ø22 mm**P** 15°**Q** M12**R** 72°**S** Ø140 mm**T** 33 mm**U** 26°**Connections****Upper**

X1

M10 x 1,0

G G0

G 1

R

G 1/2



Rotator XR 500 C HPL

Technical data

Part No.	8500003	
Type of rotator	Grapple rotator	
Weight	216 kg	
Rotation	360 degrees	
Max axial load, static	±700 kN	
Max axial load, dynamic	±250 kN	
[MaxRadialLoad]	±180 kN	
Torque at 25 Mpa	7000 Nm	
Rotation max oilflow	40 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	35 MPa	
Grapple close max working pressure	35 MPa	
Extra function 1 max working pressure	40 MPa	

Function

Central lubrication


Interface




Upper interface	265 mm
Lower interface	Ø 463 mm

Oil distributor ordered separately

Pressure limiting valves fitted.

We reserve the right to make product changes.

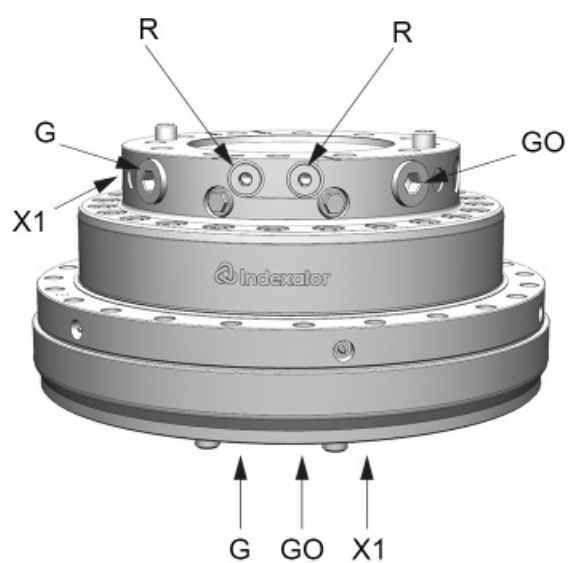

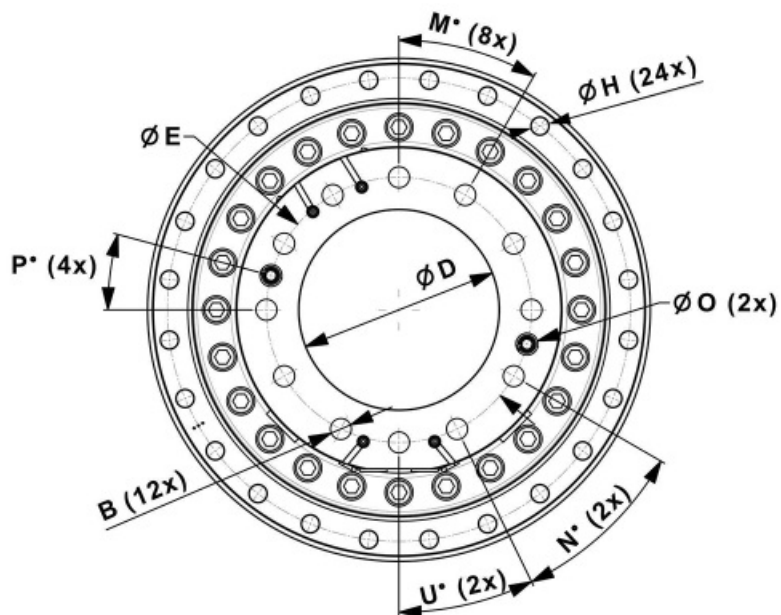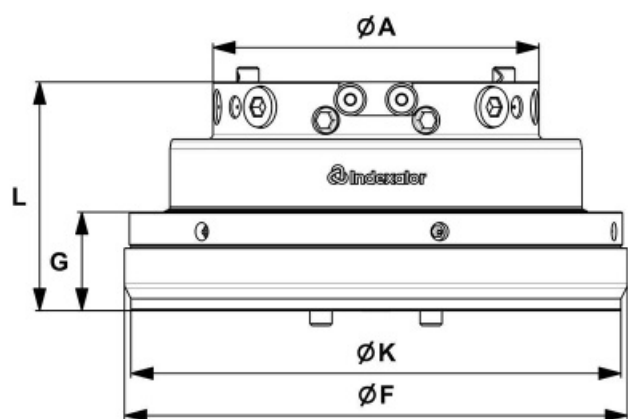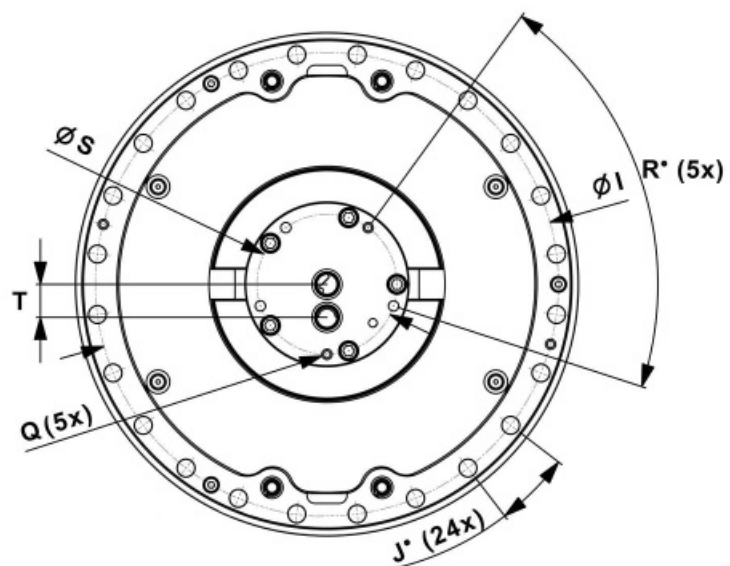

XR 500 C HPL

A	Ø326 mm
B	M24
C	37 mm
D	Ø200 mm
E	Ø265 mm
F	Ø503 mm
G	98,5 mm
H	Ø17,5 mm
I	Ø463 mm
J	15°
K	Ø490 mm
L	228,5 mm
M	30°
N	34°
O	Ø22 mm
P	15°
Q	M12
R	72°
S	Ø140 mm
T	33 mm
U	26°

Connections

Upper	X1	M10 x 1,0
	G G0	G 1
	R	G 1/2



Rotator XR 500 HPL

Technical data

Part No.	8500002	
Type of rotator	Grapple rotator	
Weight	216 kg	
Rotation	360 degrees	
Max axial load, static	±700 kN	
Max axial load, dynamic	±250 kN	
[MaxRadialLoad]	±180 kN	
Torque at 25 Mpa	7000 Nm	
Rotation max oilflow	40 l/min	
Rotation max working pressure	25 MPa	
Grapple open max working pressure	35 MPa	
Grapple close max working pressure	35 MPa	


Interface




Upper interface	265 mm
Lower interface	Ø 463 mm

Oil distributor ordered separately

Pressure limiting valves fitted.

We reserve the right to make product changes.

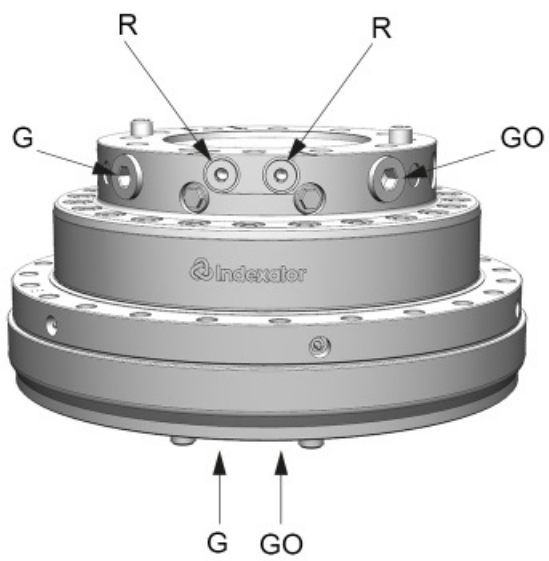

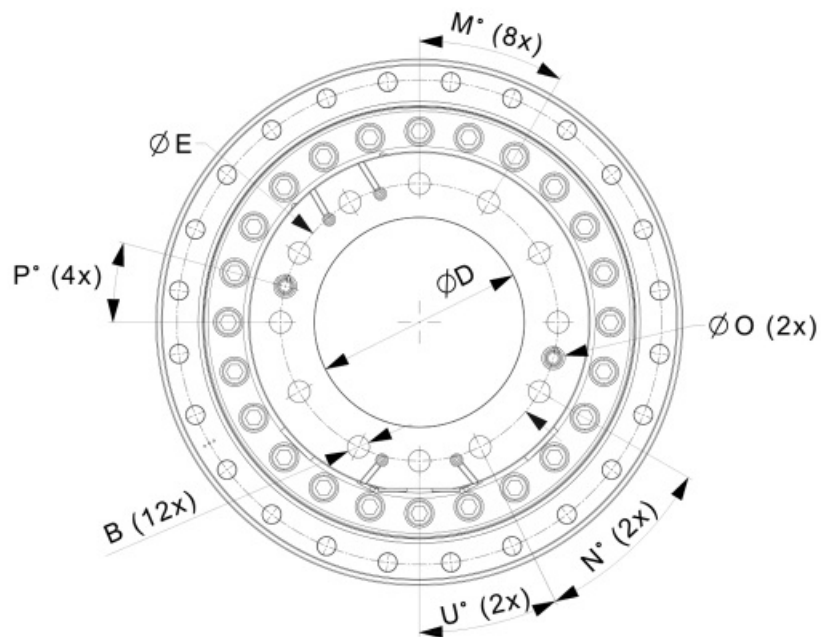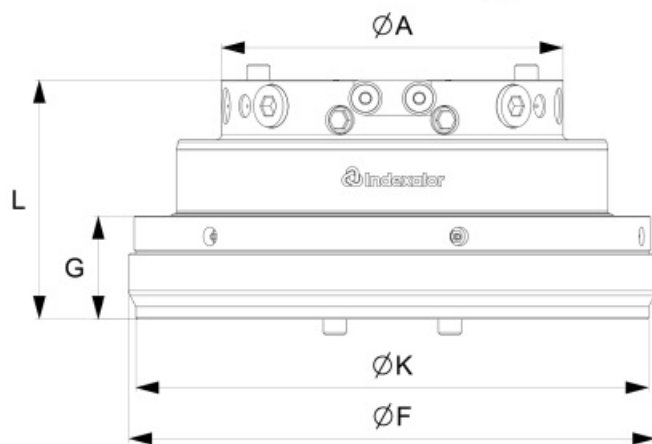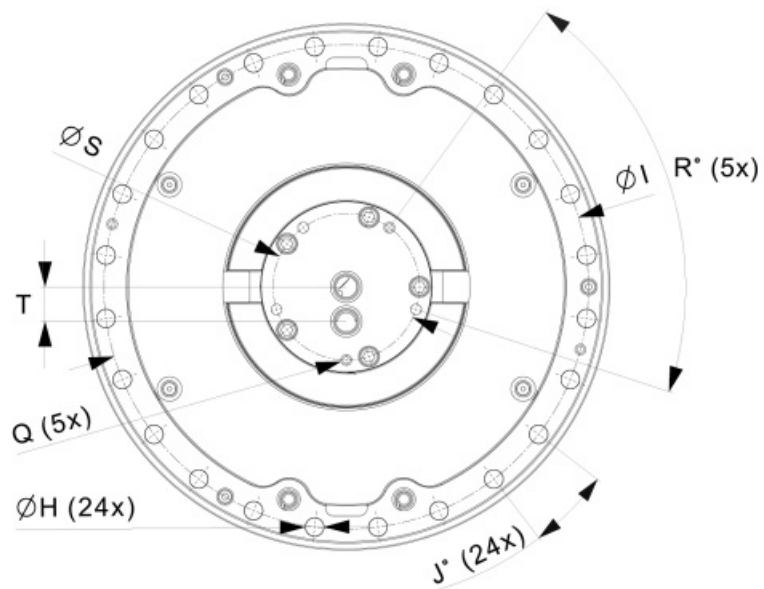

XR 500 HPL

A	Ø326 mm
B	M24
C	37 mm
D	Ø200 mm
E	Ø265 mm
F	Ø503 mm
G	98,5 mm
H	Ø17,5 mm
I	Ø463 mm
J	15°
K	Ø490 mm
L	228,5 mm
M	30°
N	34°
O	Ø22 mm
P	15°
Q	M12
R	72°
S	Ø140 mm
T	33 mm
U	26°

Connections

Upper	G G0	G 1
	R	G 1/2

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69