

Подвески. Технические характеристики.

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69



Link S-80

Technical data




Part No.	5016143
Upper interface	80 mm
Lower interface	100 mm
Weight	20 kg
Max axial load, static	160 kN

Bushing

Diameter, upper bushing (C)	Bronze	ManganBronze	Composite
Ø45 mm	2 x 1003193	2 x 5006672	-
Ø40 mm	-	2 x 5006685	1 x 5002401
Ø35 mm	-	2 x 5006687	1 x 5002402
Ø30 mm	-	-	1 x 5002403

The product is supplied with a pin and bushing in the lower position. The product is supplemented with a bushing in the upper position according to the table.

We reserve the right to make product changes.

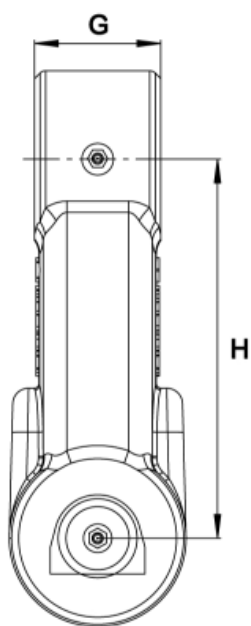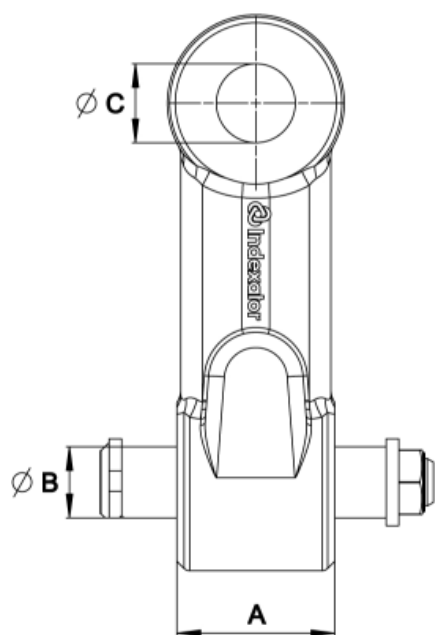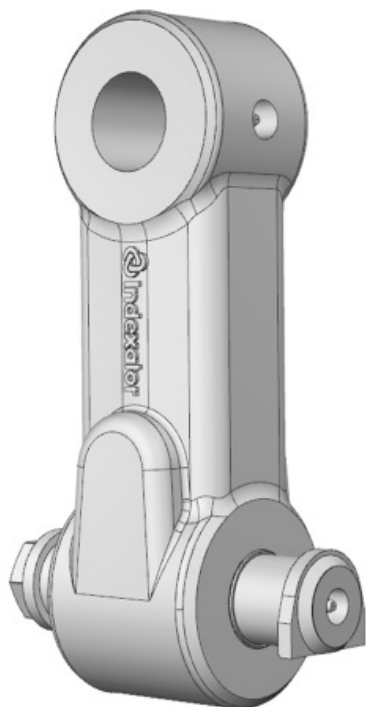

Link S-80	
A	100 mm
B	Ø45 mm
C	See table
G	80 mm
H	240 mm






Link S-100/50

Technical data

Part No.	5016224		
Upper interface	100 mm		
Lower interface	100 mm		
	Weight	20.5 kg	
	Max axial load, static	160 kN	

The product is supplied with pin in lower position and bushings in both lower and upper position.
We reserve the right to make product changes.

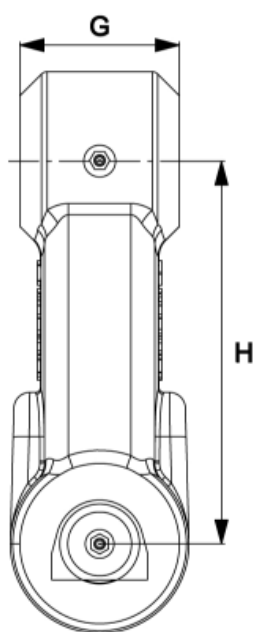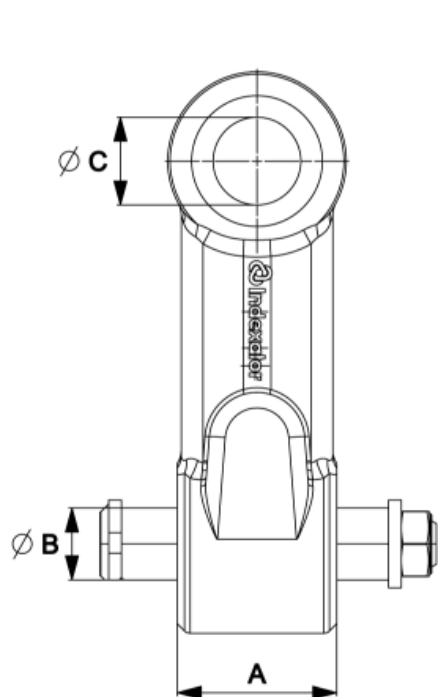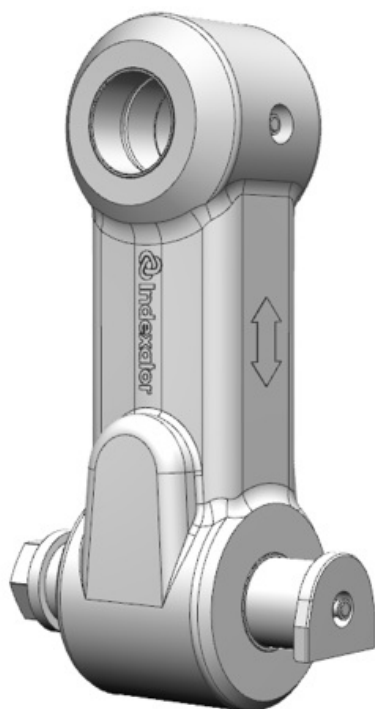

Link S-100/50	
A	100 mm
B	Ø45 mm
C	50 mm
G	100 mm
H	240 mm



Link IR 8"

Technical data




Part No.	8000385		
Upper interface	136 mm		
Lower interface	145 mm		
	Weight	20 kg	
	Max axial load, static	250 kN	

Bushing

Diameter, upper bushing (C)	Width (G) with bushing	ManganBronze
Ø60 mm	150 mm	2 x 8000695

The product is supplemented with a bushing in the upper position according to the table. The product is supplied with a bushing in the lower position. The lower pin is inserted in the rotator's mounting.

We reserve the right to make product changes.

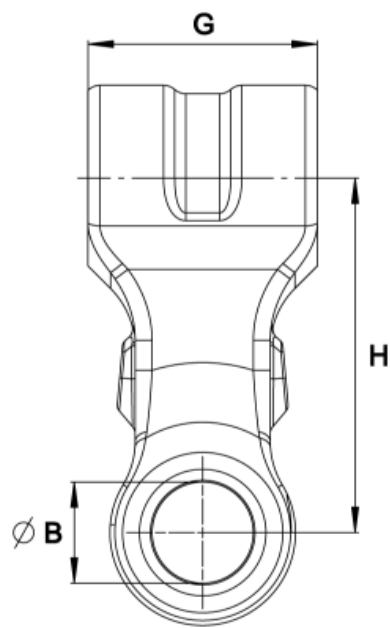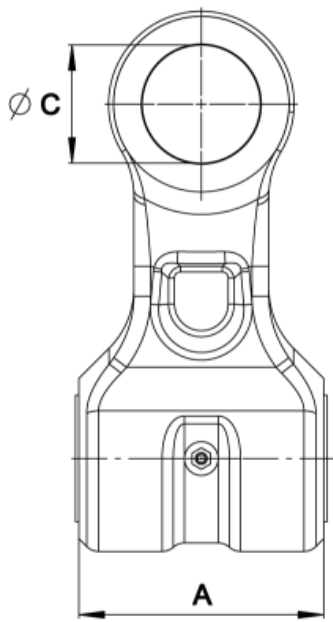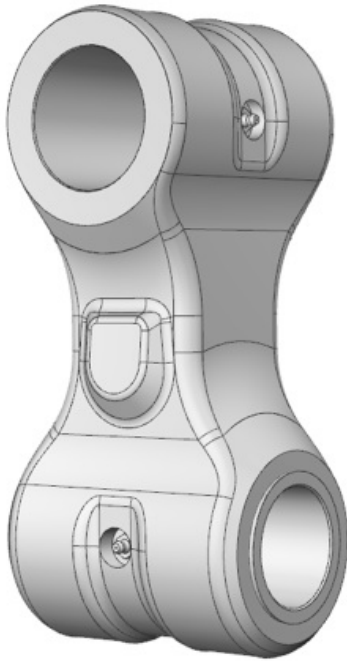

Link IR 8"	
A	145 mm
B	Ø60 mm
C	See table
G	136 mm
H	210 mm



Link IR 12"

Technical data




Part No.	8000373		
Upper interface	136 mm		
Lower interface	145 mm		
	Weight	25 kg	
	Max axial load, static	250 kN	

Bushing

Diameter, upper bushing (C)	Width (G) with bushing	ManganBronze
Ø60 mm	150 mm	2 x 8000695

The product is supplemented with a bushing in the upper position according to the table. The product is supplied with a bushing in the lower position. The lower pin is inserted in the rotator's mounting.

We reserve the right to make product changes.

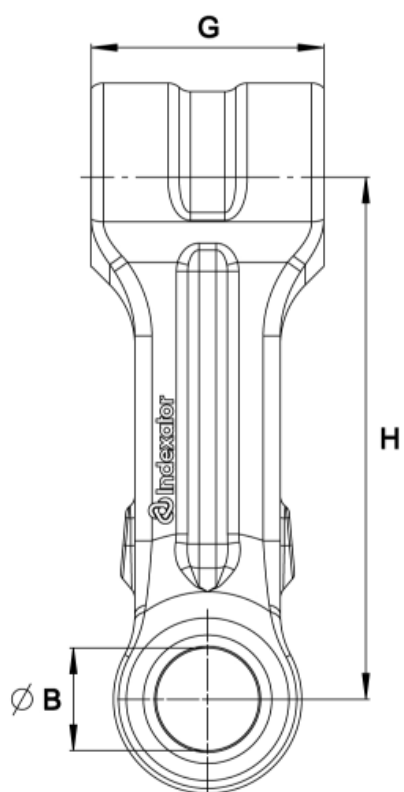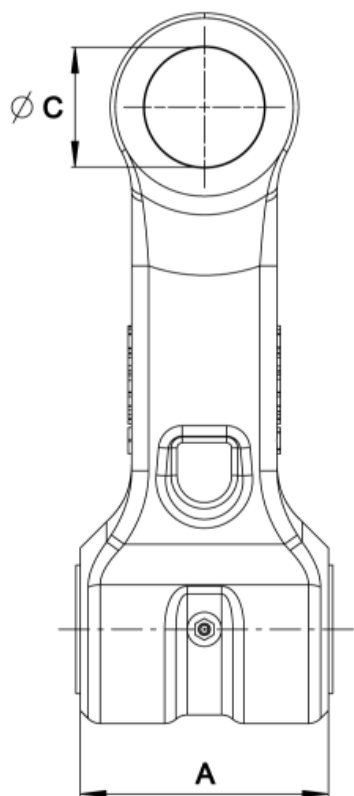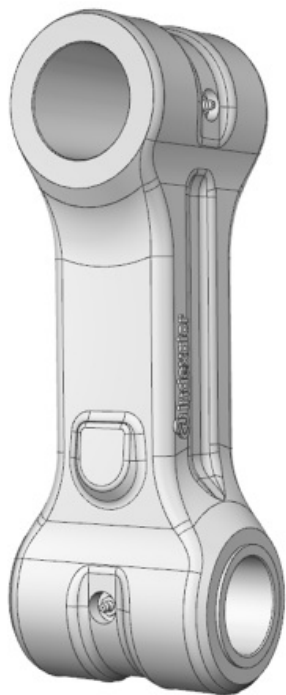

Link IR 12"	
A	145 mm
B	Ø60 mm
C	See table
G	136 mm
H	305 mm



Link 75-80/25

Technical data


Part No.	5002374	
Upper interface	80 mm	
Lower interface	76 mm	
	Weight	7 kg
	Max axial load, static	40 kN


Bushing

Upper pin diameter	Crane tip, width	Composite
Ø45 mm	80 mm	1 x 5002415
Ø45 mm	70 mm	2 x 5002419
Ø45 mm	60 mm	2 x 5002423
Ø40 mm	80 mm	1 x 5002416
Ø40 mm	70 mm	2 x 5002420
Ø40 mm	60 mm	2 x 5002424
Ø35 mm	80 mm	1 x 5002417
Ø35 mm	70 mm	2 x 5002421
Ø35 mm	60 mm	2 x 5002425
Ø30 mm	80 mm	1 x 5002418
Ø30 mm	70 mm	2 x 5002422
Ø30 mm	60 mm	2 x 5002426
Ø25 mm	80 mm	-
Ø25 mm	70 mm	-
Ø25 mm	60 mm	-

The product is supplied complete with both an upper and a lower pin set. Supplemented with a bushing if the width of the crane tip or the pin diameter requires this. See table for more information.

We reserve the right to make product changes.

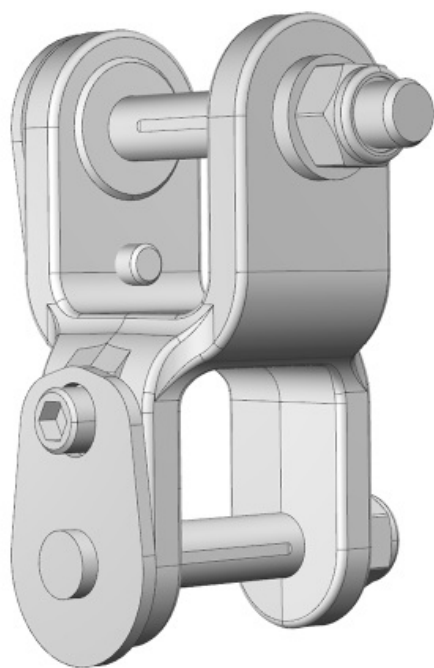

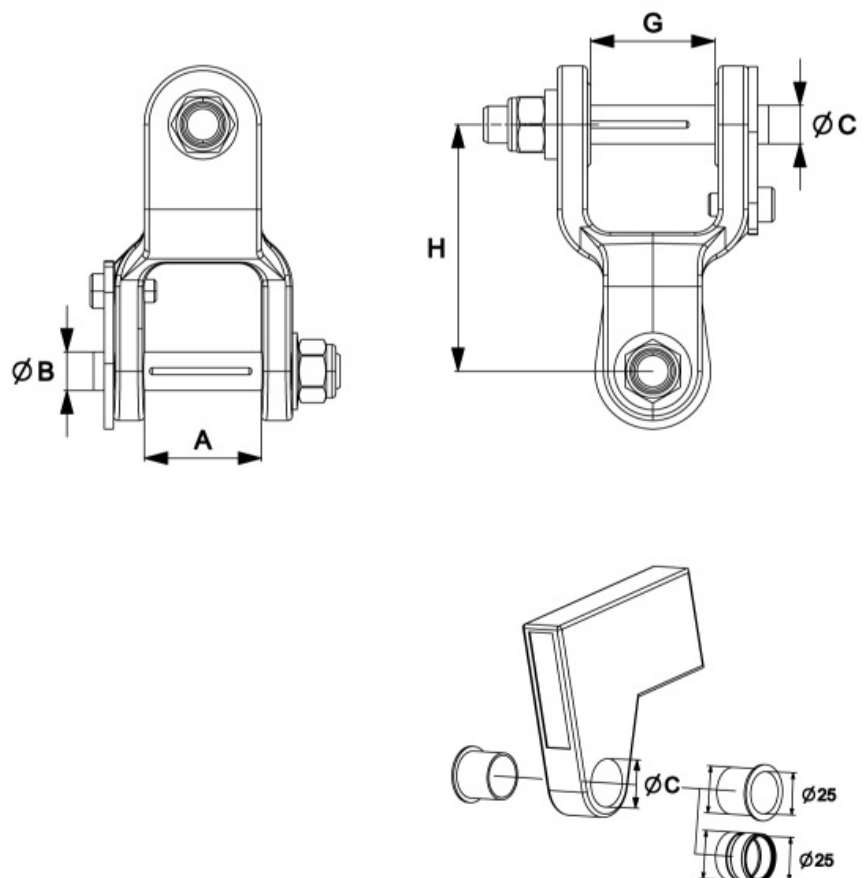

Link 75-80/25

A	76 mm
B	Ø25 mm
C	Ø25 mm
G	80 mm
H	160 mm



Link 75-80




Technical data

Part No.	5030000		
Upper interface	80 mm		
Lower interface	75 mm		
	Weight	5 kg	
	Max axial load, static	40 kN	


Bushing

Diameter, upper bushing (C)	Bronze	Composite
Ø45 mm	2 x 1003193	-
Ø40 mm	-	1 x 5002401
Ø35 mm	-	1 x 5002402
Ø30 mm	-	1 x 5002403
Ø25 mm	-	1 x 5002404

The product is supplied with a pin set in the lower position. Supplemented with a bushing in the upper position according to the table. We reserve the right to make product changes.

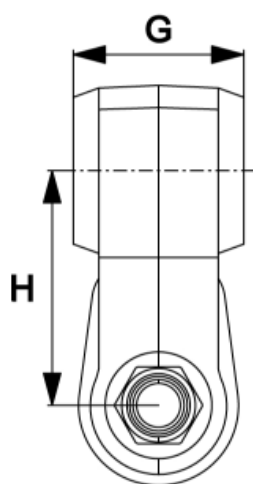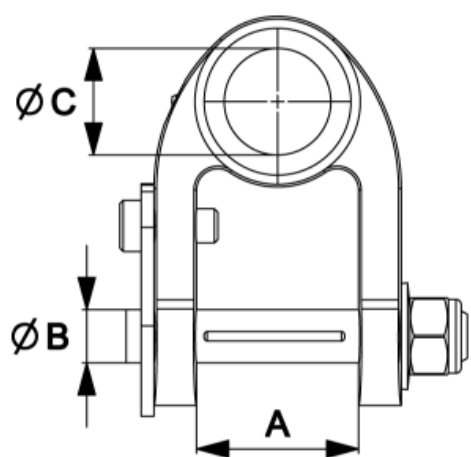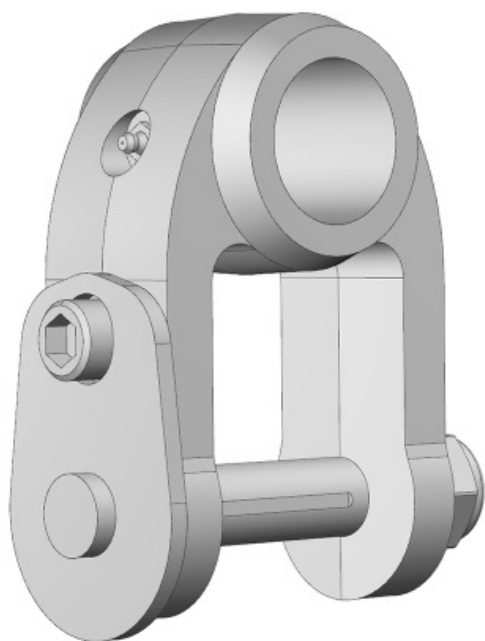

Link 75-80	
A	76 mm
B	Ø25 mm
C	See table
G	80 mm
H	110 mm

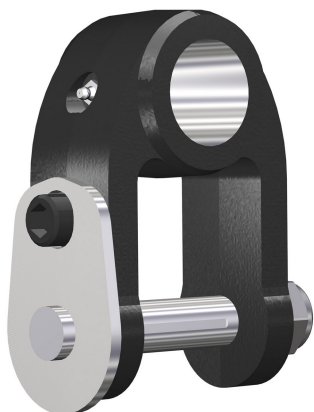

Link 75-70




Technical data

Part No.	5030001		
Upper interface	70 mm		
Lower interface	75 mm		
	Weight	5 kg	
	Max axial load, static	40 kN	

Bushing

Diameter, upper bushing (C)	Bronze	Composite
Ø45 mm	1 x 1005495 1 x 1003193	-
Ø40 mm	-	1 x 5002405
Ø35 mm	-	1 x 5002406
Ø30 mm	-	1 x 5002407
Ø25 mm	-	1 x 5002408

The product is supplied with a pin set in the lower position. Supplemented with a bushing in the upper position according to the table. We reserve the right to make product changes.

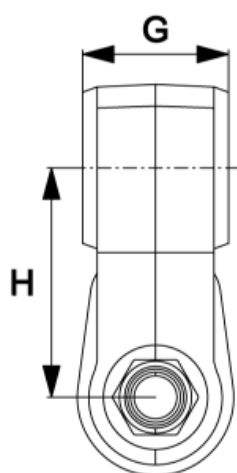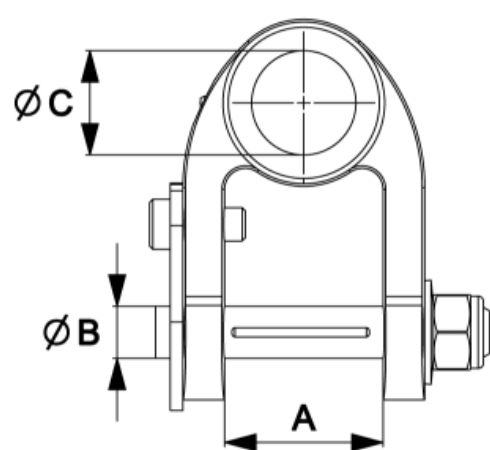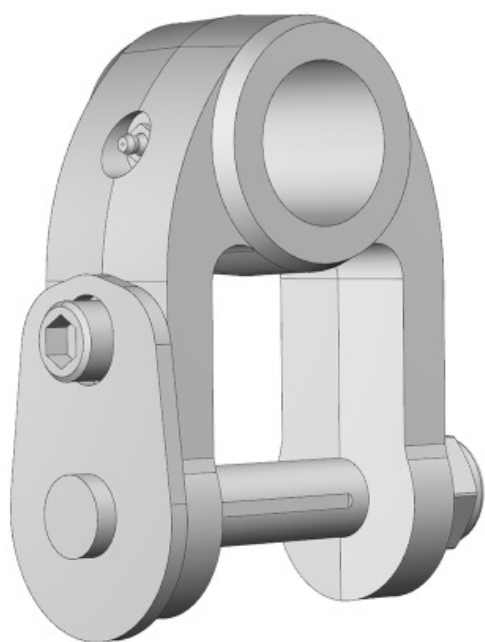

Link 75-70	
A	76 mm
B	Ø25 mm
C	See table
G	70 mm
H	110 mm



Link 75-60




Technical data

Part No.	5030002
Upper interface	60 mm
Lower interface	76 mm
Weight	4 kg
Max axial load, static	40 kN

Bushing

Diameter, upper bushing (C)	Bronze	Composite
Ø45 mm	2 x 1005495	-
Ø40 mm	-	1 x 5002409
Ø35 mm	-	1 x 5002410
Ø30 mm	-	1 x 5002411
Ø25 mm	-	1 x 5002412

The product is supplied with a pin set in the lower position. Supplemented with a bushing in the upper position according to the table.
We reserve the right to make product changes.

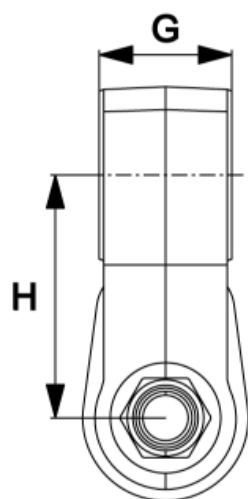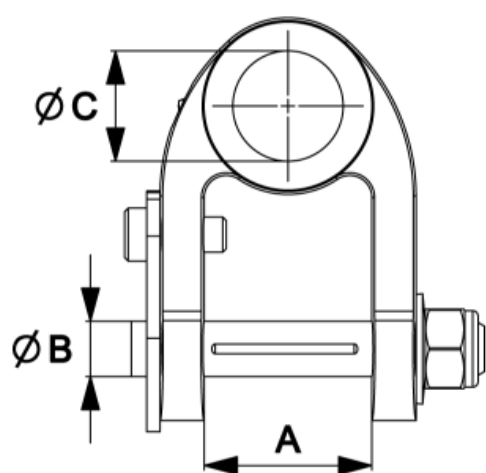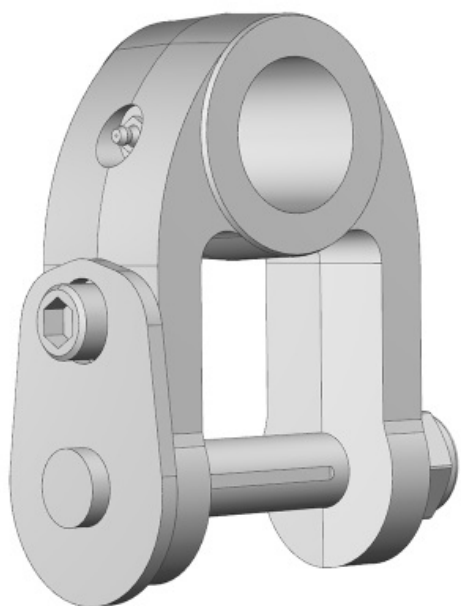

Link 75-60	
A	76 mm
B	Ø25 mm
C	See table
G	60 mm
H	110 mm





Link 80-71/30

Technical data

Part No.	5002070	
Upper interface	71 mm	
Lower interface	80 mm	
	Weight	13 kg
	Max axial load, static	100 kN

We reserve the right to make product changes.

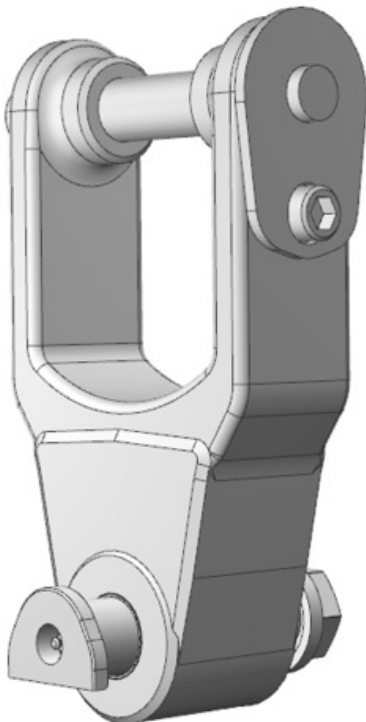

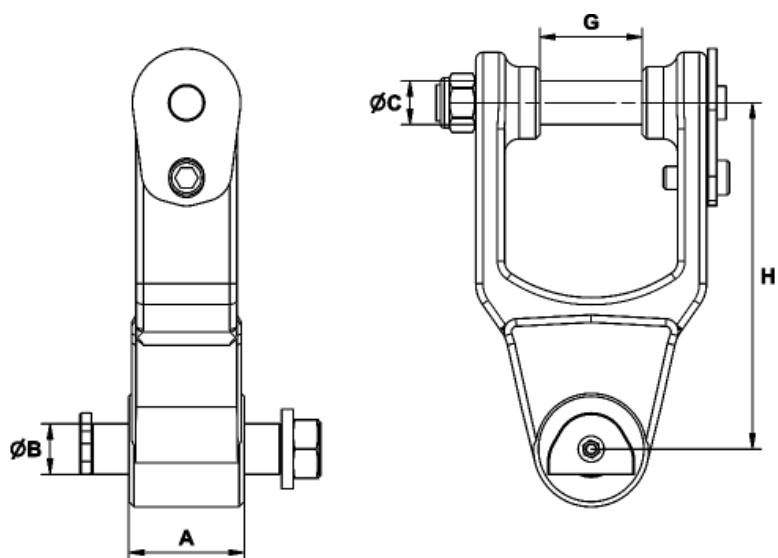

Link 80-71/30

A	80 mm
B	Ø35 mm
C	Ø30 mm
G	71 mm
H	240 mm





Link 75-71/30

Technical data

Part No.	5002075	
Upper interface	71 mm	
Lower interface	75 mm	
Weight		10 kg
Max axial load, static		40 kN

We reserve the right to make product changes.

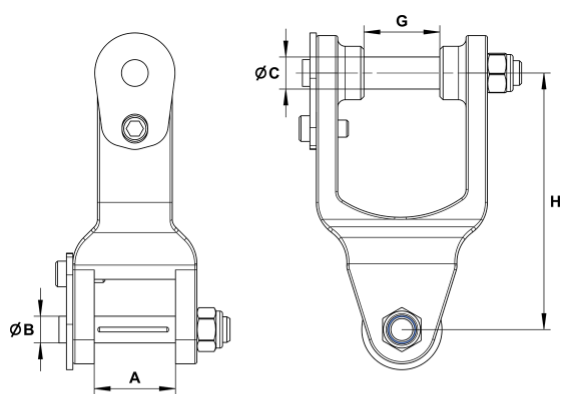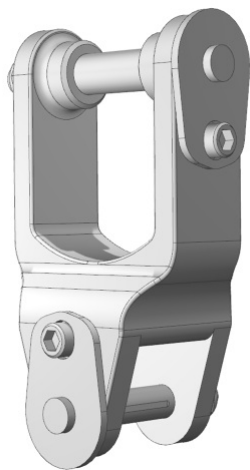

Link 75-71/30	
A	76 mm
B	Ø25 mm
C	Ø30 mm
G	71 mm
H	240 mm



Link 80-80 L150

Technical data




Part No.	5006610		
Upper interface	80 mm		
Lower interface	80 mm		
	Weight	10 kg	
	Max axial load, static	100 kN	

Bushing

Diameter, upper bushing (C)	Bronze	ManganBronze	Composite
Ø45 mm	2 x 1003193	2 x 5006672	-
Ø40 mm	-	2 x 5006685	1 x 5002401
Ø35 mm	-	2 x 5006687	1 x 5002402
Ø30 mm	-	-	1 x 5002403
Ø25 mm	-	-	1 x 5002404

The product is supplied with a pin and bushing in the lower position. The product is supplemented with a bushing in the upper position according to the table.

We reserve the right to make product changes.

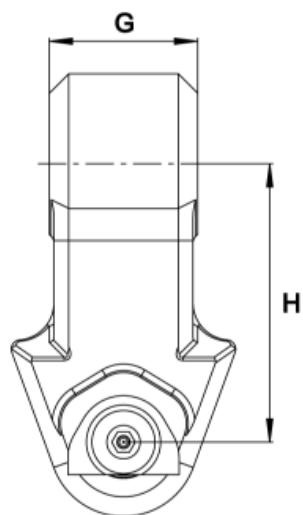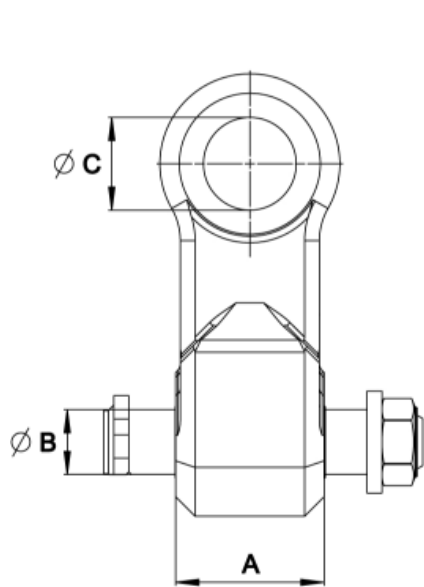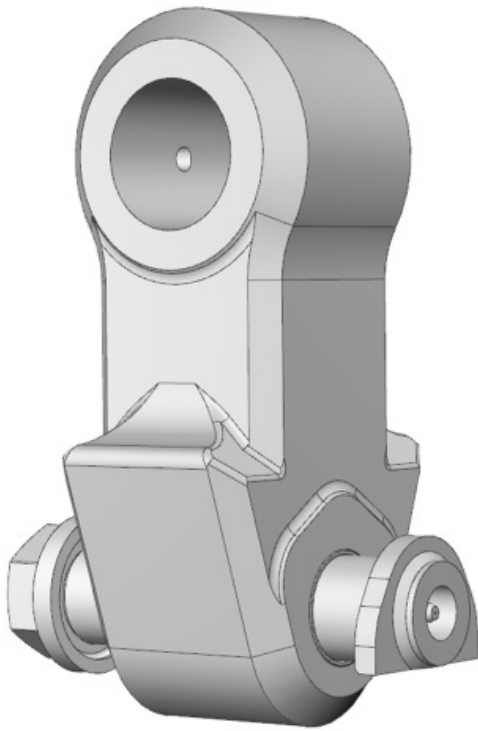

Link 80-80 L150	
A	80 mm
B	Ø35 mm
C	See table
G	80 mm
H	150 mm



Link 80-80

Technical data




Part No.	5006509		
Upper interface	80 mm		
Lower interface	80 mm		
	Weight	12 kg	
	Max axial load, static	100 kN	

Bushing

Diameter, upper bushing (C)	Bronze	ManganBronze	Composite
Ø45 mm	2 x 1003193	2 x 5006672	-
Ø40 mm	-	2 x 5006685	1 x 5002401
Ø35 mm	-	2 x 5006687	1 x 5002402
Ø30 mm	-	-	1 x 5002403
Ø25 mm	-	-	1 x 5002404

The product is supplied with a pin and bushing in the lower position. The product is supplemented with a bushing in the upper position according to the table.

We reserve the right to make product changes.

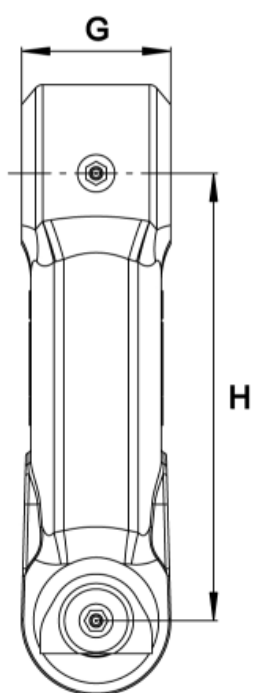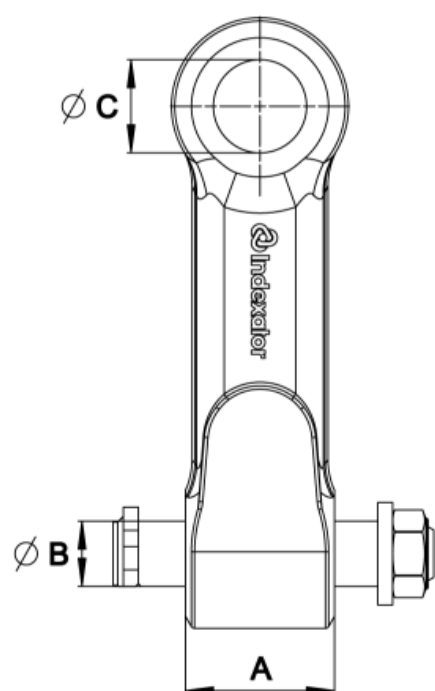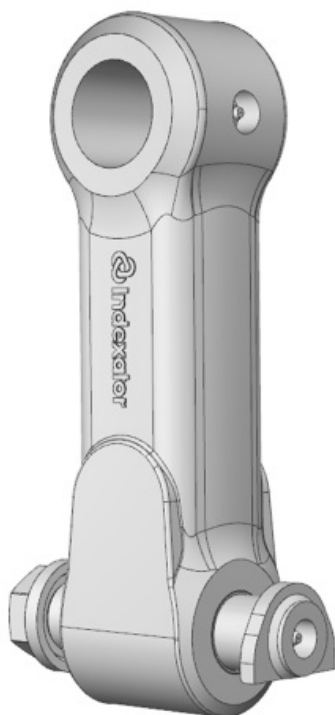

Link 80-80	
A	80 mm
B	Ø35 mm
C	See table
G	80 mm
H	240 mm



Link S-100

Technical data




Part No.	5016144		
Upper interface	100 mm		
Lower interface	100 mm		
	Weight	21 kg	
	Max axial load, static	160 kN	

Bushing

Diameter, upper bushing (C)	Steel	Bronze	ManganBronze	Composite
Ø45 mm	2 x 1002302	2 x 1005503	2 x 5006683	-
Ø40 mm	-	-	2 x 5002467	2 x 5002414

The product is supplied with a pin and bushing in the lower position. The product is supplemented with a bushing in the upper position according to the table.

We reserve the right to make product changes.

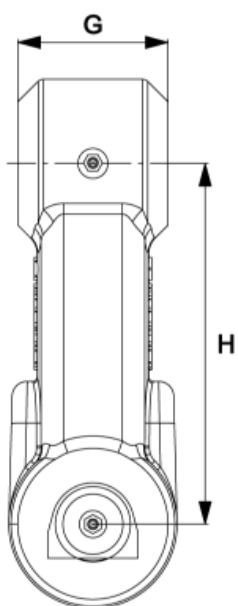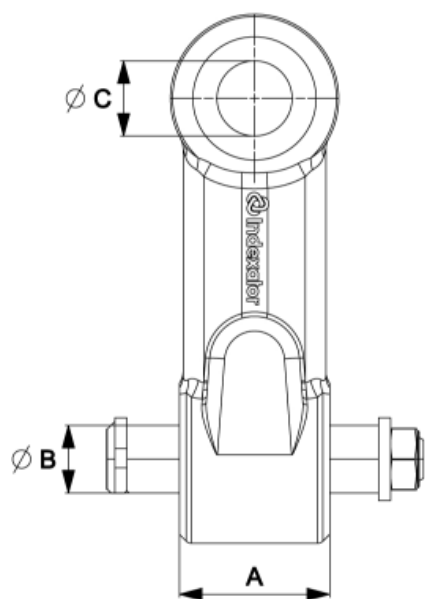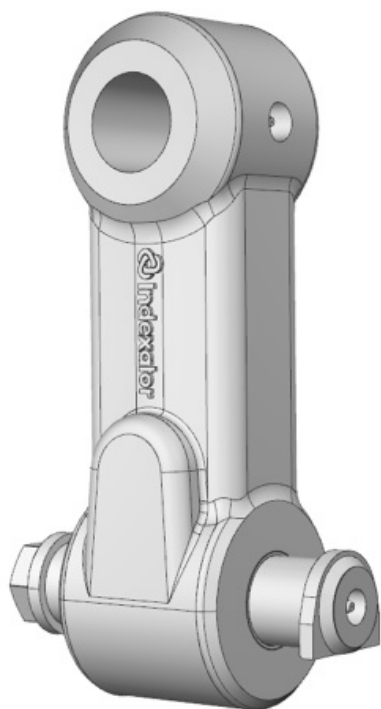

Link S-100

A 100 mm

B Ø45 mm

C See table

G 100 mm

H 240 mm

По вопросам продаж и поддержки обращайтесь: itd@nt-rt.ru

www.indexator.nt-rt.ru

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62

Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81 Магнитогорск
(3519)55-03-13 Москва
(495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73 Омск
(3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64

Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54 Сочи
(862)225-72-31 Ставрополь
(8652)20-65-13 Сургут
(3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59 Уфа
(347)229-48-12 Хабаровск
(4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Казахстан (7273)495-231

Киргизия (996)312-96-26-47

Таджикистан (992)427-82-92-69